

LASER BLADE

DOWNLIGHT TRIM MODEL: ILB01 / 02 / 05 / 10 / 15 - TR - UC - REM

GENERAL LIGHT TRIM MODEL: ILB05 / 10 / 15 - TR - UC - REM

WALL WASHER TRIM MODEL: ILB05 / 10 / 15 - TR - UC - REM

INSTRUCTIONS SHEET

PAGE: 1 of 1

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

⚠ DISCONNECT THE MAIN LINE BEFORE WIRING SECONDARY CONNECTORS.

UNDERCABINET FIXTURE INSTALLATION (UC) - REMOTE DRIVER (REM)

A- MAKE THE CUT-OUT OPENING (**SEE DIMENSIONS BELOW**). LEAVE AT LEAST 6" (152mm) OF FEEDER CABLE ACCESSIBLE FROM UNDER THE CEILING.



B- MAKE ALL NECESSARY CONNECTIONS (**FOLLOWING WIRING DIAGRAM AND POLARITY MARKING**) USING THE QUICK CONNECTORS (**INCLUDED**).

C- HOLD THE (2) CLIPS UPWARD AND INSERT FIXTURE INTO CUT-OUT.

A + B + C

WIRING DIAGRAM

Multiple luminaires must be connected in series (home run or fixture chain)

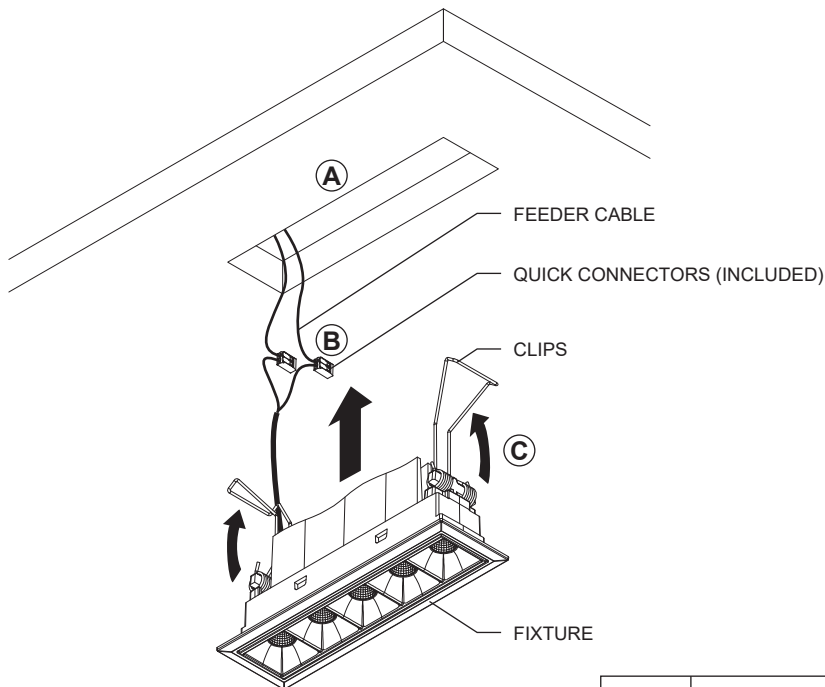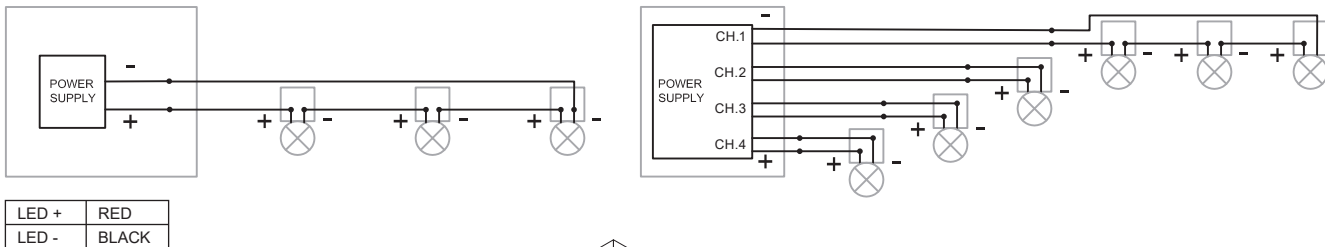

Models	Cut-out dimensions	Ceiling thickness	Clearance
LB01	1 3/8" x 1 3/8" (35 x 35mm)	1/8" to 1 1/8" (3mm to 29mm)	2 1/2" (64mm)
LB02	1 3/8" x 2 1/2" (35 x 64mm)		
LB05	1 1/2" x 5 1/16" (37 x 141mm)		
LB10	1 1/2" x 10 13/16" (37 x 274mm)		
LB15	1 1/2" x 16" (37 x 406mm)		