


Last information update: April 2025

**Product configuration: 554B.01**

554B.01: Ø116 Spot LV spotlight - DALI Powerline - Reflector - 22W 2248lm - 3500K - CRI 90 - White

**Product code**

554B.01: Ø116 Spot LV spotlight - DALI Powerline - Reflector - 22W 2248lm - 3500K - CRI 90 - White

**Technical description**

Miniaturised adjustable spotlight with adapter for installation on a 48V Filorail low voltage track. Body consisting of two painted diecast aluminium shells coupled together and a painted zamak track connection. An ideal passive dissipation system to guarantee a long life and effective heat management. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each spotlight on the track to be adjusted separately. The swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic unit guarantees a high level of visual comfort. The anti-scratch reflector made of P.V.D. (Physical Vapour Deposition) aluminium provides optimum performance in terms of light efficiency. A rapid tool-free system for connecting the adapter electrically and mechanically to the track. Spotlight with Push&Go system designed to facilitate and safely accelerate the connection between product and optic accessory. Mechanically disconnecting the accessory allows it to be disengaged but not dropped. Three internal accessories and one external one can be used simultaneously. All internal accessories rotate 360° about the spotlight longitudinal axis.

**Installation**

Installation on a Filorail track.

**Colour**

White (01)

**Mounting**

Low voltage track

**Wiring**

LED driver integrated in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.


**Notes**

The front frame (obligatory style accessory) needs to be purchased separately.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	2248	MacAdam Step:	2
W system:	22	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Im source:	2810	Voltage [Vin]:	48
W source:	21	Lamp code:	LED
Luminous efficiency (Im/W, real value):	102.2	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	80	LED current [mA]:	600
Beam angle [°]:	19°	Power factor:	See installation instructions
CRI (minimum):	90	Control:	DALI
Colour temperature [K]:	3500		

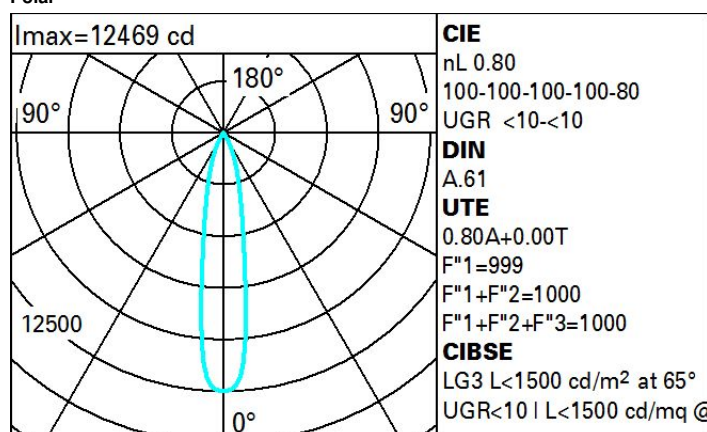**Polar**

**CIE**  
nL 0.80  
100-100-100-100-80  
UGR <10-<10  
**DIN**  
A.61  
**UTE**  
0.80A+0.00T  
F"1=999  
F"1+F"2=1000  
F"1+F"2+F"3=1000  
**CIBSE**  
LG3 L<1500 cd/m² at 65°  
UGR<10 | L<1500 cd/mq @

