

Last information update: May 2025

Product configuration: 865C.15

865C.15: 27 Recessed Full Remote – Warm White – 48Vdc – L=1243mm – Wide Flood optic - 15.2W 1478.4lm - 2700K - Grey

**Product code**

865C.15: 27 Recessed Full Remote – Warm White – 48Vdc – L=1243mm – Wide Flood optic - 15.2W 1478.4lm - 2700K - Grey

Technical description

Direct light linear luminaire, designed to use monochrome LED lamps. For ground, wall and ceiling installations, the product requires an outer casing (to be purchased separately). The outer casing is not required for installations in panelled walls and ceilings. The body is made of extruded aluminium and includes die-cast aluminium end caps with 50/60 Shore A silicone seals. It is subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 8mm thick transparent glass screen, fixed with silicone. Complete with Warm White multi-LED circuit. Both the control card (available in a DMX-RDM and DALI version) and the power supply must be purchased separately. Supplied with a connector with an IP68 threaded locknut. Fitted with an Opti Beam Reflector optical system with a Wide Flood optic. All external screws used are made of A2 stainless steel.

Installation

The outer casing (to be purchased separately) is required for recessed floor, wall and ceiling installations. The outer casing is not required for installations in panelled walls and ceilings. For floor installations a drainage channel must be constructed or gravel inserted for drainage under the outer casing before installation, to guarantee the required IP protection rating. For ceiling installations with plasterboard panels (1-30 mm thick), make the preparation openings as indicated in the instructions sheet and use the steel cables with reinforcement plates in the accessory kit.

**Colour**

Grey (15)

Weight (Kg)

1.9

Mounting

wall recessed|Floor recessed|ceiling recessed|ground recessed

Complies with EN60598-1 and pertinent regulations



IK09



IP67



IP68

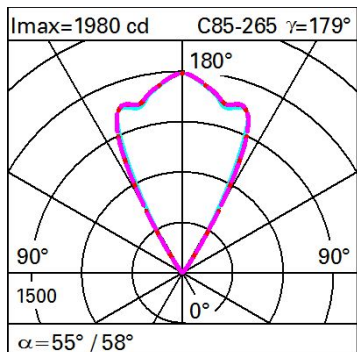
Complete immersion for limited periods, not suitable for use in swimming pools or fountains. The lighting fixtures were designed and tested to withstand a static load of up to 5000 N.

Technical data

lm system:	1478	Colour temperature [K]:	2700
W system:	15.2	MacAdam Step:	3
lm source:	2240	Life Time LED 1:	100,000h - L85 - B10 (Ta 25°C)
W source:	12	Life Time LED 2:	100,000h - L85 - B10 (Ta 40°C)
Luminous efficiency (lm/W, real value):	97.3	Voltage [Vin]:	48
lm in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	1478	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	66	ZVEI Code:	LED
Beam angle [°]:	55° / 58°	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -20°C to +35°C. (*)
Rf (Colour Fidelity Index):	87	LED current [mA]:	40
Rg (Gamut Index):	95	Control:	PWM

* Preliminary data

Polar

Imax=1980 cd C85-265 γ=179°		Lux				
		h	d1	d2	Em	Emax
	180°	4	4.2	4.4	97	124
	90°	8	8.3	8.9	24	31
	0°	12	12.5	13.3	11	14
	α = 55° / 58°	16	16.6	17.7	6	8