


Last information update: April 2025

Product configuration: 908A.01

908A.01: SIPARIO Ø86 spotlight - DALI - WW - OBLens - - White

**Product code**

908A.01: SIPARIO Ø86 spotlight - DALI - WW - OBLens - - White

Technical description

Ø86 adjustable spotlight with adapter for installation on a base or electrified track. LED lamp with high colour rendering C.O.B. (Chip on board) technology.

Die-cast aluminium body with thermoplastic rear cap and front ring (Mass-Balance). The product can be rotated by 360° around the vertical axis with a mechanical lock and tilted by 90° relative to the horizontal plane. Passive heat dissipation.

OptiBeam Lens optic system and wall-washer light distribution for homogeneous vertical wall lighting.

Dimmable electronic DALI-2 power supply integrated in the body of the luminaire.

Spotlight with Push&Go system designed to facilitate and safely accelerate the connection between product and optic accessory.

Mechanically disconnecting the accessory allows it to be disengaged but not dropped. Three internal accessories and one external one can be used simultaneously. All internal accessories rotate 360° about the spotlight longitudinal axis.

Installation

Base or mains voltage track.

Colour

White (01)

Weight (Kg)

0.87

Mounting


three circuit track

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1250	Colour temperature [K]:	3500
W system:	18	MacAdam Step:	2
Im source:	1760	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	16	Lamp code:	LED
Luminous efficiency (lm/W, real value):	69.4	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	71	Control:	DALI-2
CRI (minimum):	97		

Polar

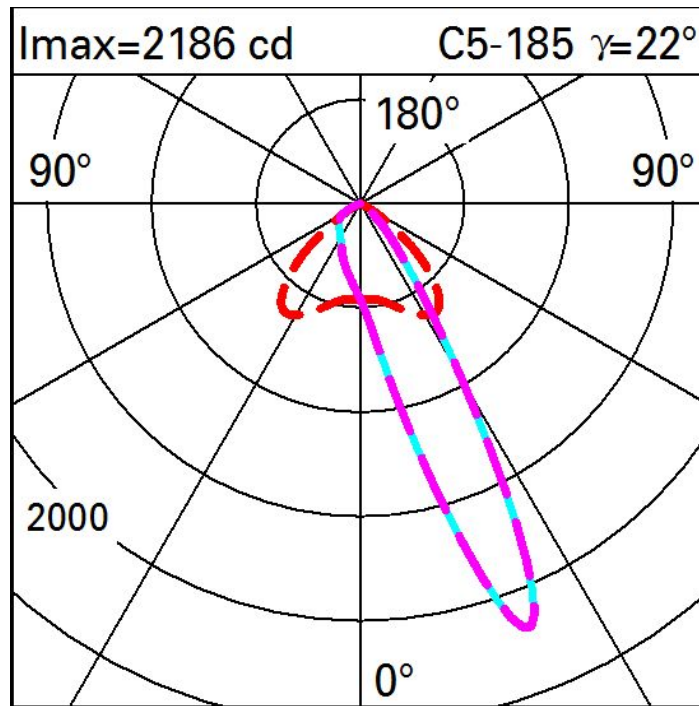

Illuminances

Lux													Wall distance = 1m	
3														
			0.1	0.7	3	13	3	0.7	0.1					
2	0.3	0.8	2	5	17	46	17	5	2	0.8	0.3			
	0.8	2	7	26	61	88	61	26	7	2	0.8			
1	2	6	16	46	102	142	102	46	16	6	2			
	4	11	27	59	99	118	99	59	27	11	4			
0														
	m	-2	-1	0	1	2	3							