

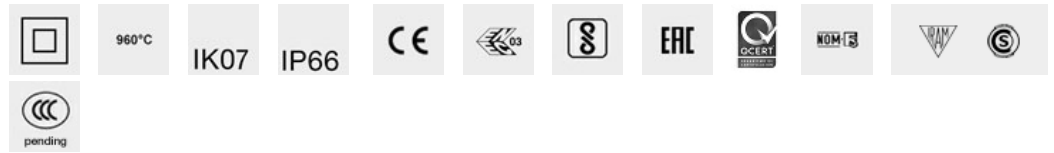



BK34: Deckenleuchte für Außenbereiche - Led Warm White - integriertes elektronisches Vorschaltgerät Vin=100÷240Vac - Flood-Optik



Polardiagramm

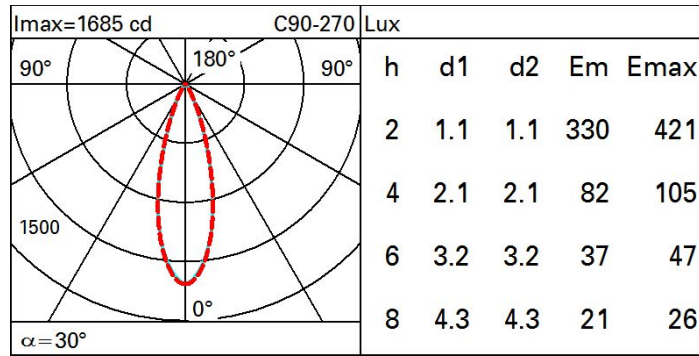

Isolux

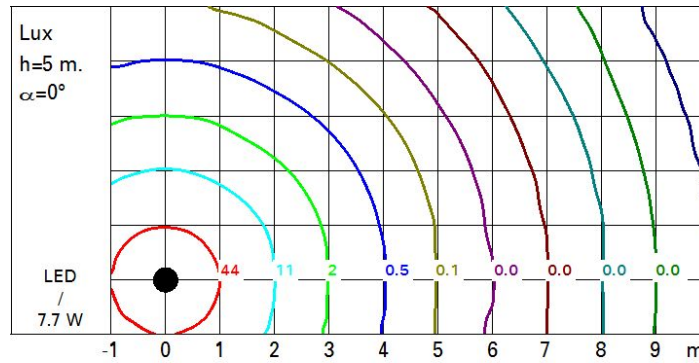

UGR-Diagramm

Corrected UGR values (at 810 lm bare lamp luminous flux)										
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise			
2H	2H	8.0	8.6	8.3	8.8	9.0	7.8	8.4	8.1	8.6
	3H	7.9	8.4	8.2	8.7	8.9	7.7	8.2	8.0	8.5
	4H	7.8	8.3	8.2	8.6	8.9	7.7	8.1	8.0	8.4
	6H	7.7	8.2	8.1	8.5	8.8	7.6	8.0	7.9	8.3
	8H	7.7	8.1	8.1	8.5	8.8	7.5	8.0	7.9	8.3
	12H	7.7	8.1	8.1	8.4	8.8	7.5	7.9	7.9	8.2
4H	2H	7.8	8.3	8.1	8.6	8.9	7.7	8.1	8.0	8.4
	3H	7.7	8.1	8.1	8.4	8.8	7.5	7.9	7.9	8.3
	4H	7.6	8.0	8.0	8.3	8.7	7.5	7.8	7.9	8.2
	6H	7.5	7.8	8.0	8.2	8.7	7.4	7.7	7.8	8.1
	8H	7.5	7.8	7.9	8.2	8.6	7.3	7.6	7.8	8.0
	12H	7.4	7.7	7.9	8.1	8.6	7.3	7.5	7.7	8.0
8H	4H	7.5	7.8	7.9	8.2	8.6	7.3	7.6	7.8	8.0
	6H	7.4	7.6	7.9	8.1	8.6	7.2	7.5	7.7	7.9
	8H	7.3	7.5	7.8	8.0	8.5	7.2	7.4	7.7	7.9
	12H	7.3	7.5	7.8	8.0	8.5	7.1	7.3	7.6	7.8
12H	4H	7.4	7.7	7.9	8.1	8.6	7.3	7.5	7.7	8.0
	6H	7.3	7.5	7.8	8.0	8.5	7.2	7.4	7.7	7.9
	8H	7.3	7.5	7.8	8.0	8.5	7.1	7.3	7.6	7.8
Variations with the observer position at spacing:										
S = 1.0H		5.0 / -9.1					5.2 / -9.1			
1.5H		7.8 / -11.3					8.0 / -11.1			
2.0H		9.8 / -12.7					9.9 / -12.5			