


Last information update: February 2024

**Product configuration: BM07+1129.15+Profile 02**

BM07: Neutral White - ST1.C optic

1129.15: diffuser glass - Grey

**Product code**BM07: Neutral White - ST1.C optic **Attention! Code no longer in production****Technical description**

Outdoor luminaire with high visual comfort (G6) down light street optic, designed to use LED lamps. The optical assembly and the pole attachment system are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. 6 mm thick tempered sodium-calcium closing glass with customised serigraphy. The system for fixing the frame to the assembly uses 2 stainless steel captive screws and a hinge mechanism for easy opening. Complete with circuit having Neutral White monochrome LEDs, silver aluminium reflectors. LEDs can be substituted in the lab in groups of 12. Control gear, connected using quick-couplings, can be removed using clips. Driver with automatic inner temperature control system. Driver with 4 different operating profiles, without the aid of external controls, fixed profiles (1\_2\_3) at 100% corresponding to three different lumen outputs and profile (4) with midnight point recognition and lumen output related to profile 1. Profiles can be selected using microswitches (operating cycles can be customised using dedicated software and a dedicated USB interface). Dali and 0\_10V versions available upon request. Selv 220-240V ac 50/60Hz electronic ballast. Replaceable control gear unit. The luminaire has a graduated scale for setting the vertical angle. Optical assembly complete with decompression valve, for easy opening by eliminating the internal vacuum. The light flow emitted in the upper hemisphere of the system in the horizontal position is null. All screws used are made of AISI 304 stainless steel.

**Installation**

The floodlight can be pole-mounted using a single or double arm. It can also be wall-mounted, or pole-mounted in an intermediate position, using an arm made of die-cast aluminium and galvanised sheet steel, which are coated with RAL 9007 liquid acrylic paint.

**Colour**

Grey (15)


**Mounting**

wall surface|pole-top side entry

**Wiring**

The extractable component-holding plate is made of anodised aluminium. The control gear includes ballast, explosion-proof capacitor, fast-coupling terminal boards and fuse-holding disconnecting switch (upon request). The fitting has double insulation - class II - and is designed for earth connection (class I).

Complies with EN60598-1 and pertinent regulations

**Accessory code**1129.15: diffuser glass - Grey **Attention! Code no longer in production****Technical description**

Single wall-mounted fitting made up of an attachment and a U-shaped bracket. The diecast-aluminium intermediate attachment is subjected to acrylic painting. The U-shaped bracket is made of galvanised painted bent sheet steel. The U-shaped bracket is coupled to the attachment by means of 2 stainless-steel screws M12x30. Two more stainless-steel screws M12x30 make it possible to fix the projector to the wall-mounted fitting. The fitting/projector assembly is fixed thanks to two screws M12x40.

**Installation**

Wall application.


**Colour**

Grey (15)

**Weight (Kg)**

1.45


Complies with EN60598-1 and pertinent regulations




# Technical data

|  |      |                                       |                                |
|--|------|---------------------------------------|--------------------------------|
| Im system:   | 4390 | MacAdam Step:                         | 3                              |
| W system:  | 44.1 | Life Time LED 1:                      | 100,000h - L90 - B10 (Ta 25°C) |
| Im source:   | -    | Life Time LED 2:                      | 100,000h - L90 - B10 (Ta 40°C) |
| W source:  | -    | Ballast losses [W]:                   | 6.1                            |
| Luminous efficiency (lm/W, real value):            | 99.5 | Lamp code:                            | LED                            |
| Im in emergency mode:                              | -    | Number of lamps for optical assembly: | 1                              |
| Total light flux at or above an angle of 90° [Lm]: | 0    | ZVEI Code:                            | LED                            |
| Light Output Ratio (L.O.R.) [%]:                   | 100  | Number of optical assemblies:         | 1                              |
| CRI (minimum):                                     | 70   | Intervall temperatura ambiente:       | from -20°C to +35°C.           |
| Colour temperature [K]:                            | 4000 |                                       |                                |

## Polar

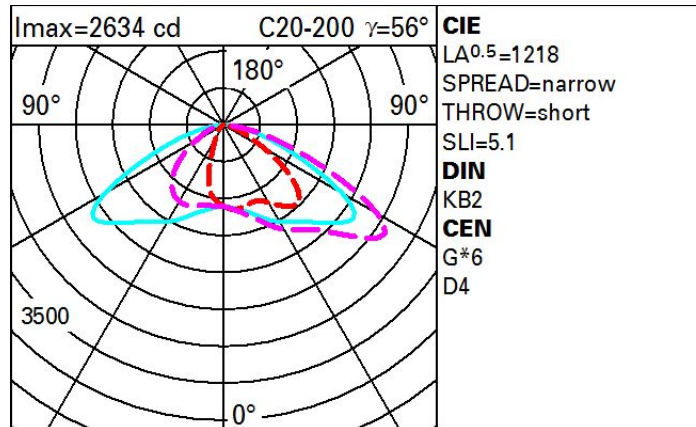

## Isolux

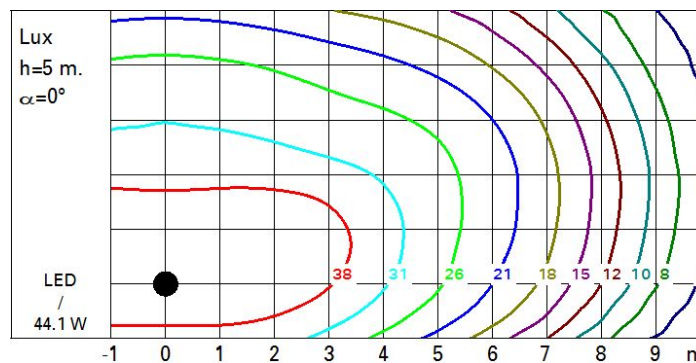

## Utilisation factors

