


Last information update: April 2025

Product configuration: EJ99

EJ99: Recessed Frame section 15 LEDs - integrated DALI - Wall Washer Longitudinal Glare Control

**Product code**

EJ99: Recessed Frame section 15 LEDs - integrated DALI - Wall Washer Longitudinal Glare Control

Technical description

Miniaturized recessed linear luminaire for LED lamps. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient and homogeneous effect on walls from top to bottom and avoids shadow zones near the ceiling. The black polycarbonate perimeter frame is designed to significantly reduce the effect of longitudinal glare. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Flux enhancer - superpure aluminium reflector - asymmetrical textured PMMA screen. Supplied with a power supply unit connected to the luminaire. High efficiency value Neutral White LED (lm/W).

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 276. To light walls correctly check the installation distances and centre-to-centre distances indicated on the instructions sheet.

Colour

Black / Black (43) | Black / White (47) | Grey / Black (74)*

Weight (Kg)

0.75

* Colours on request

**Mounting**

ceiling recessed

Wiring

Integrated dimmable DALI control gear. Connection to mains network on power supply box; screw connections.

Complies with EN60598-1 and pertinent regulations



IP20


IP43

On the visible part of the product once installed

**Technical data**

Im system:	1008	Colour temperature [K]:	4000
W system:	28.4	MacAdam Step:	2
Im source:	3150	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	25	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	35.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	32	Number of optical assemblies:	1
CRI (minimum):	80	Control:	DALI-2

Polar

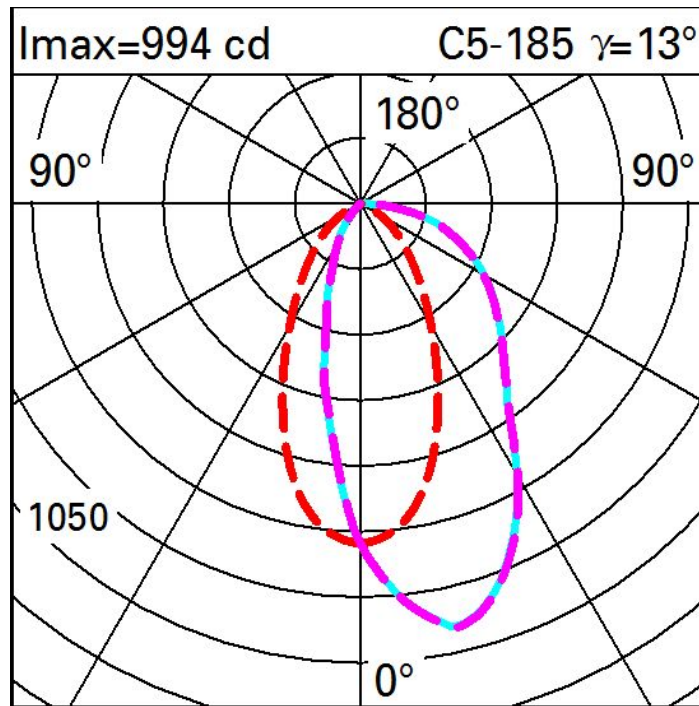

Illuminances

Lux										
Wall distance = 1m										
3	0.7	2	6	26	104	206	104	26	6	0.7
2	2	5	14	40	105	169	105	40	14	5
1	3	7	16	39	80	109	80	39	16	7
0	4	8	16	33	59	75	59	33	16	8
	4	8	14	26	40	48	40	26	14	8
	m	-2	-1	0	1	2	3			