


Last information update: May 2025

Product configuration: EK80

EK80: Recessed frame - LED - Neutral white - Incorporated DALI dimmable power supply - Wall washer optic

**Product code**

EK80: Recessed frame - LED - Neutral white - Incorporated DALI dimmable power supply - Wall washer optic

Technical description

Miniaturized recessed rectangular luminaire with LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Asymmetrical optic system designed to achieve an effective wall washer distribution. Flux enhancer - superpure aluminium reflector - screen in PMMA with ribbed texture; a special film in acrylic material, combined with the screen, allow for a uniform and effective light emission on the wall. Black polycarbonate internal perimeter frame. Supplied with DALI dimmable control gear connected to the luminaire. Neutral white LED.

Installation

recessed with steel springs for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal) - preparation slot 37 x 141. To light the wall correctly check the installation distances and centre-to-centre distances on the instructions sheet.

Colour

Black / Black (43) | Black / White (47) | Grey / Black (74)*

Weight (Kg)

0.3

* Colours on request

Mounting

wall recessed|ceiling recessed

Wiring

on power box: screw connections

Notes


dimming function with pushbutton (TOUCH DIM/PUSH): for this option consult the instructions included in the package. Accessory anti-glare screen available code MPX7.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	580	CRI (typical):	82
W system:	12.7	Colour temperature [K]:	4000
lm source:	1450	MacAdam Step:	3
W source:	9.8	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	45.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	40	Number of optical assemblies:	1
CRI (minimum):	80	Control:	DALI-2

Polar

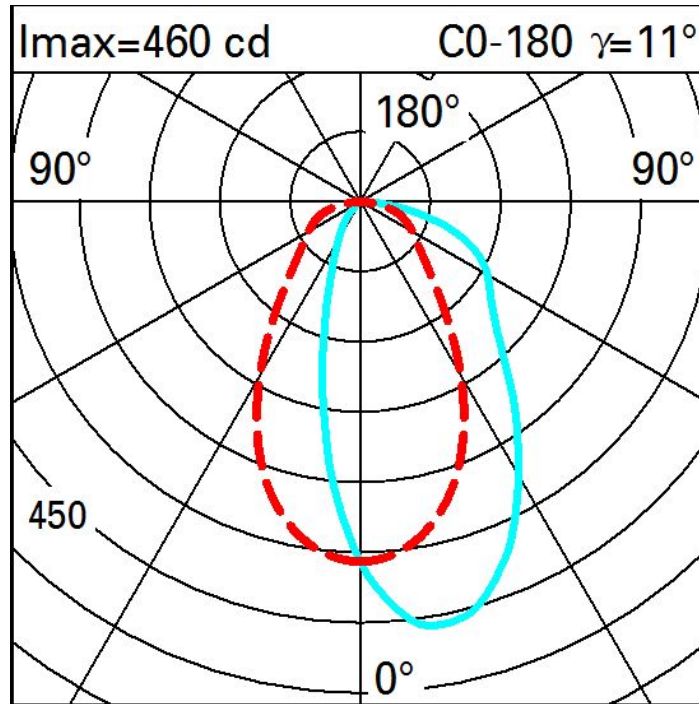

Illuminances

Lux										
Wall distance = 1m										
3										
	1	3	7	19	58	104	58	19	7	1
2	3	5	10	24	54	76	54	24	10	3
	3	5	11	23	43	54	43	23	11	3
1	3	5	10	19	30	35	30	19	10	3
	3	5	9	14	20	22	20	14	9	3
0										
m	-2	-1	0	1	2	3				