

Design iGuzzini iGuzzini

**Product configuration: EQ57.15**

Product code

### Technical description

## Installation

**Colour**  
Grey (15)

**Weight (Kg)**  
6.1

## Mounting

wall arm|pole-top

## Notes

In the event of installations on insulated supports (like fibreglass poles) it is mandatory (or strongly recommended) to use the accessory code X899 to protect the luminaire from eventual faults due to electrostatic charges.


Complies with EN60598-1 and pertinent regulations



## Technical data

Im system:	12420	Voltage [Vin]:	230
W system:	87.6	Lamp code:	LED
Im source:	-	Number of lamps for optical assembly:	1
W source:	-	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	141.8	Number of optical assemblies:	1
Im in emergency mode:	-	Intervallo temperatura ambiente:	from -40°C to 35°C.
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	100	Inrush current:	41.6 A / - μs
CRI (minimum):	70	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 6 luminaires B16A: 10 luminaires C10A: 10 luminaires C16A: 17 luminaires
Colour temperature [K]:	3000	Minimum dimming %:	5
MacAdam Step:	3	Overvoltage protection:	10kV Common mode & 6kV Differential mode
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)	Control:	Midnight preset/DALI NFC

# Polar

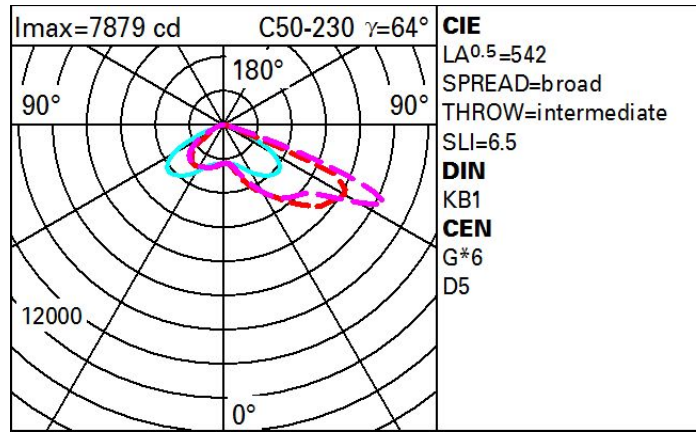

# Isolux

