

Last information update: April 2025

Product configuration: ET19

ET19: Spotlight with bracket - Warm White LED - Integrated Ballast - Wall Washer optic - Ta 25°

**Product code**

ET19: Spotlight with bracket - Warm White LED - Integrated Ballast - Wall Washer optic - Ta 25°

Technical description

Spotlight designed to use LED lamps and a Wall Washer optic. Consists of a die-cast aluminium optical assembly, bracket and box for the ballast with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The Opti Beam Lens optical system comes complete with a Warm White monochrome LED circuit. The electronic DALI ballast is integrated in the product and compatible with remote management systems. Compatible with programming systems via DALI terminals or an NFC system. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Installation

Floor, ceiling or wall-mounted installation.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)


Weight (Kg)

9.35

Wiring


Double PG.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	7068	MacAdam Step:	3
W system:	86.9	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	11400	Lamp code:	LED
W source:	78	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	81.3	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 35°C.
Light Output Ratio (L.O.R.) [%]:	62	Power factor:	See installation instructions
CRI (minimum):	80	Overvoltage protection:	10kV Common mode & 6kV Differential mode
Colour temperature [K]:	2700	Control:	DALI-2

Polar

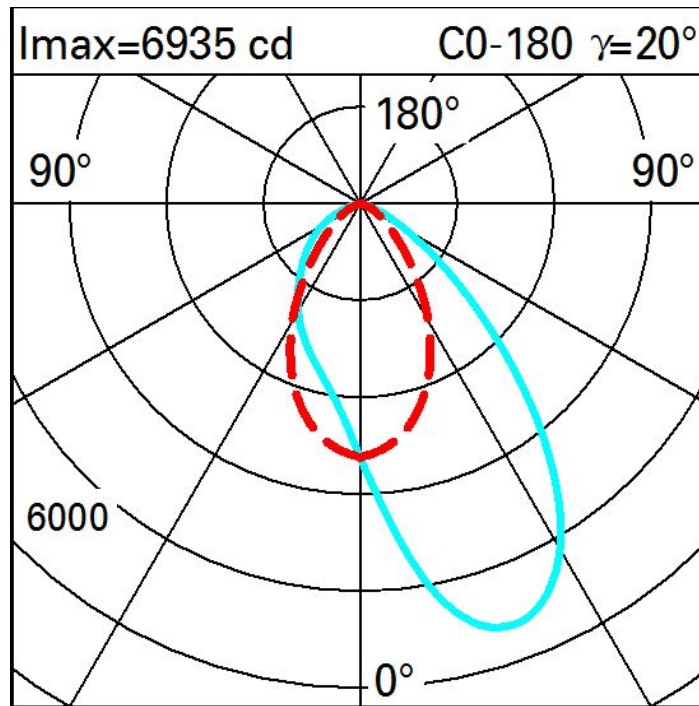

Illuminances

Lux												Wall distance = 1m	
3													
	0.7	3	14	47	104	131	96	37	10	2	0.5		
2	11	27	64	138	235	307	287	156	60	22	8		
	21	41	79	144	222	297	348	251	120	49	20		
1	25	42	70	115	165	227	287	245	143	73	35		
	24	38	59	85	113	153	197	194	143	86	45		
0													
	m	-2	-1	0	1	2	3						