

Last information update: May 2025

**Product configuration: EU23**

EU23: Spotlight with bracket - RGBW - Integrated control card - Remote power supply - Wide Flood optic

**Product code**

EU23: Spotlight with bracket - RGBW - Integrated control card - Remote power supply - Wide Flood optic

**Technical description**

Spotlight designed to use RGBW (Red Green Blue White 3000K) LED lamps, a Wide Flood optic and a DMX512-RDM control. Consists of a die-cast aluminium optical assembly, bracket and box for the power supply with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The optical system is Opti Beam Lens. The power supply is remote whereas the DMX control card is integrated in the product and compatible with remote management systems. Opportunity to use both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles). All external screws used are made of A2 stainless steel.

**Installation**

Floor, ceiling or wall-mounted installation.

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

14.16

**Wiring**

Double PG.

Complies with EN60598-1 and pertinent regulations




IK08

IP66


**Technical data**

Im system:	6695	Colour temperature [K]:	RGBW - 3000K
W system:	118.7	Life Time LED 1:	95,000h - L80 - B10 (Ta 25°C)
Im source:	10300	Lamp code:	LED
W source:	108	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	56.4	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 35°C.
Light Output Ratio (L.O.R.) [%]:	65	LED current [mA]:	300
Beam angle [°]:	42°	Control:	DMX-RDM
CRI (typical):	82		

# Polar

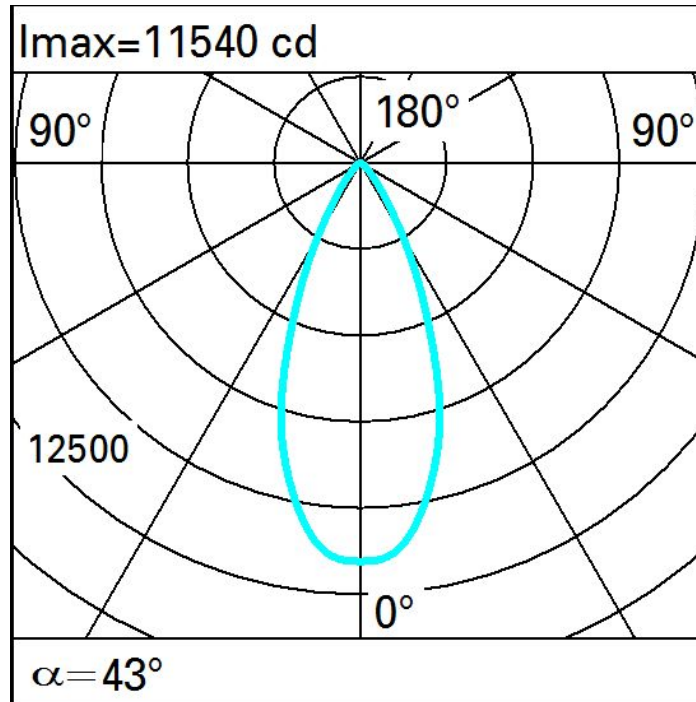

# Isolux

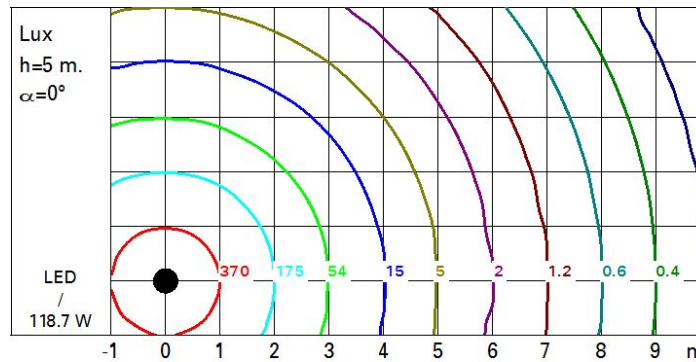

# Illuminances

