

Last information update: May 2025

**Product configuration: EY68**

EY68: 47 surface Integral – Warm White – 220÷240 Vac DMX512-RDM – L=611mm - WallGrazing Medium optic

**Product code**EY68: 47 surface Integral – Warm White – 220÷240 Vac DMX512-RDM – L=611mm - WallGrazing Medium optic **Attention! Code no longer in production****Technical description**

Direct light luminaire, designed to use monochrome LED lamps, DMX512-RDM 220÷240Vac dimmable with searching and addressing function. Ceiling, wall or surface-mounted. It consists of a body and installation brackets to be ordered separately. The body is made of extruded aluminium and includes die-cast aluminium end caps with 50/60 Shore A silicone seals. It is subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate in Warm White and a 220÷240Vac DMX512-RDM electronic driver (ballast included). Supplied with a nickel-plated brass PG11 single cable gland with H05RN-F 5x1,5mm<sup>2</sup> rubber outlet cable with male IP68 connector. Fitted with a PMMA diffusing filter and optics with a plastic (methacrylate) lens for Wall Grazing Medium lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

**Installation**

Accessories are available for installation, like adjustable AISI304 stainless steel wall-mounted arms.

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

1.8

**Mounting**

wall arm|wall surface|ceiling surface


**Wiring**

Complete with DMX-RDM control card and a 220-240V ac electronic ballast. The product is supplied with a nickel-plated brass PG11 single cable gland with H05RN-F 5x1,5mm<sup>2</sup> rubber outlet cable with male IP68 connector. Available for electrical connection and DMX-RDM control: IP68 5-pin female connector, IP68 5-pin male + female connector, and IP68 3-way, 5-pin male/female 250/400 V junction connector for DMX.

**Notes**


Product complete with LED lamp. DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (BZQ7).

Complies with EN60598-1 and pertinent regulations

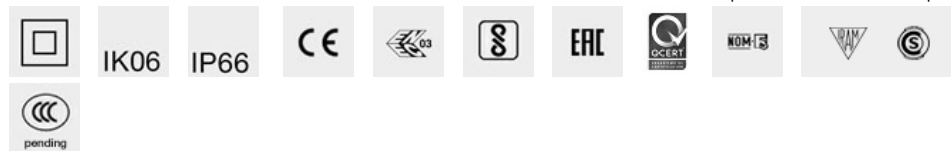**Technical data**

Im system:	1404	MacAdam Step:	3
W system:	27.8	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	2600	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	21	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	50.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	54	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -30°C to 50°C.
Colour temperature [K]:	2700	Control:	DMX-RDM

Polar

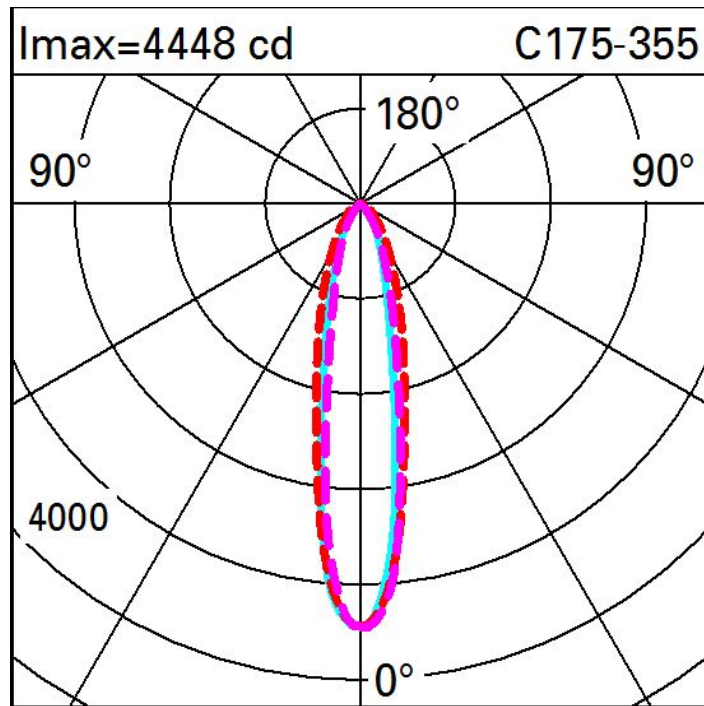

Illuminances

Lux						Wall distance = 1m					
3											
	0.2	0.5	1	3	7	9	7	3	1	0.5	0.2
2	1	3	5	10	16	20	16	10	5	3	1
	2	4	7	16	31	40	31	16	7	4	2
1	3	5	9	20	34	44	34	20	9	5	3
	3	5	11	19	29	38	29	19	11	5	3
0											
	m	-2	-1	0	1	2	3				