


EZ32: 47 surface Integral – 220÷240Vac DMX512-RDM – L=1205mm – Flood optic



Im system:	1404	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
W system:	40.5	Life Time LED 2:	96,000h - L80 - B10 (Ta 40°C)
Im source:	2700	Voltage [Vin]:	230
W source:	31	Lamp code:	LED
Luminous efficiency (lm/W, real value):	34.7	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	52	Intervallo temperatura ambiente:	from -30°C to 50°C.
Beam angle [°]:	34°	Control:	DMX-RDM

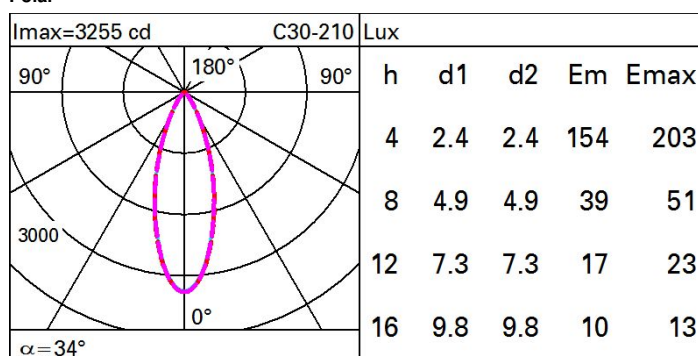

Isolux

