


EZ50: 47 surface Integral – Warm White – 220÷240Vac DALI – L=1205mm - Wall Grazing Spot optic



Im system:	3432	MacAdam Step:	3
W system:	51.5	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	5200	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	41	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	66.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	66	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -30°C to 50°C.
Colour temperature [K]:	2700	Control:	DALI-2

Polar

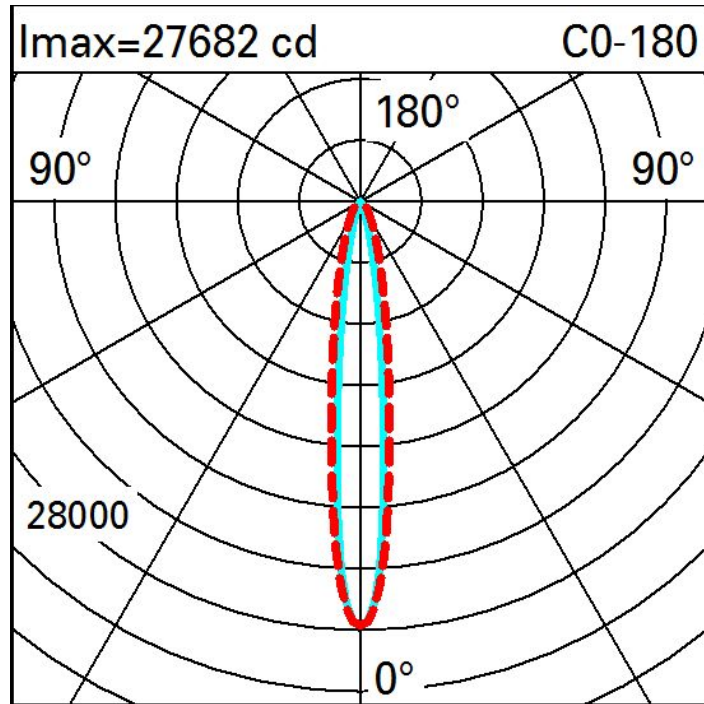

Illuminances

Lux												Wall distance = 1m	
3													
	0.4	0.9	2	6	14	19	14	6	2	0.9	0.4		
2	2	4	8	15	25	32	25	15	8	4	2		
	3	6	9	16	25	32	25	16	9	6	3		
1	4	6	9	15	26	35	26	15	9	6	4		
	4	6	9	15	25	36	25	15	9	6	4		
0													
	m	-2	-1	0	1	2	3						