


EZ70: 47 surface Integral – Warm White – 220÷240Vac DALI – L=1205mm - Wall Grazing WideFlood optic



Im system:	4088	MacAdam Step:	3
W system:	51.5	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	5600	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	41	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	79.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	73	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -30°C to 50°C.
Colour temperature [K]:	3000	Control:	DALI-2

Polar

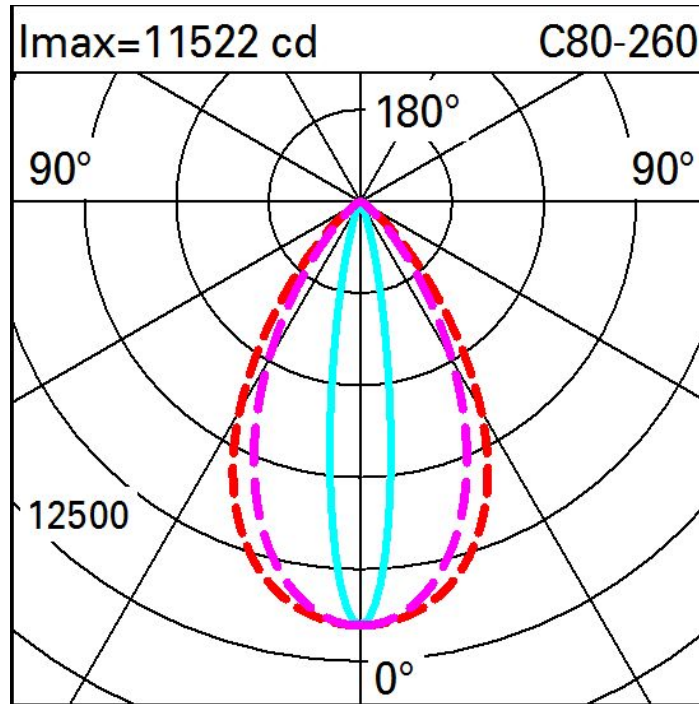

Illuminances

Lux													Wall distance = 1m	
3	0.1	0.2	0.6	1	3	4	3	1	0.6	0.2	0.1			
2	0.9	2	3	5	7	9	7	5	3	2	0.9			
	2	3	6	8	10	11	10	8	6	3	2			
1	3	5	8	11	12	14	12	11	8	5	3			
	5	9	12	15	15	18	15	15	12	9	5			
0														
	m	-2	-1	0	1	2	3							