




# Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	63	68	65	65	62	77
1.0	76	72	69	68	71	69	69	66	81
1.5	80	77	75	73	76	74	73	71	87
2.0	82	80	79	77	79	78	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	82	81	79	97
4.0	86	85	84	84	84	83	82	80	99
5.0	86	86	85	85	84	84	83	81	100

## Curva límite de luminancia

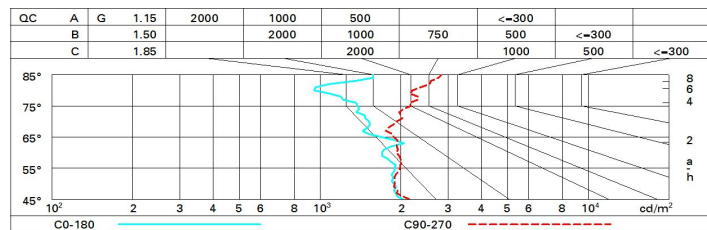

## Diagrama UGR

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	8.7	9.2	9.0	9.4	9.7	9.5	10.0	9.7	10.2	10.4
	3H	8.9	9.3	9.2	9.6	9.9	9.5	10.0	9.8	10.2	10.5
	4H	9.0	9.4	9.3	9.7	10.0	9.5	9.9	9.8	10.2	10.5
	6H	9.0	9.4	9.4	9.7	10.0	9.5	9.8	9.8	10.2	10.5
	8H	9.0	9.4	9.4	9.7	10.0	9.4	9.8	9.8	10.1	10.5
	12H	9.0	9.4	9.4	9.7	10.1	9.4	9.8	9.8	10.1	10.4
4H	2H	8.8	9.2	9.1	9.5	9.8	9.9	10.4	10.3	10.6	10.9
	3H	9.1	9.5	9.5	9.8	10.2	10.2	10.6	10.6	10.9	11.3
	4H	9.3	9.6	9.7	10.0	10.4	10.3	10.6	10.7	11.0	11.4
	6H	9.4	9.7	9.8	10.1	10.5	10.4	10.6	10.8	11.0	11.5
	8H	9.4	9.7	9.8	10.1	10.5	10.3	10.6	10.8	11.0	11.5
	12H	9.4	9.7	9.9	10.1	10.6	10.3	10.5	10.8	11.0	11.4
8H	4H	9.4	9.6	9.8	10.0	10.5	10.8	11.0	11.2	11.4	11.9
	6H	9.5	9.7	10.0	10.2	10.7	11.0	11.2	11.4	11.6	12.1
	8H	9.6	9.8	10.1	10.2	10.7	11.0	11.2	11.5	11.6	12.1
	12H	9.7	9.8	10.2	10.3	10.8	11.0	11.2	11.5	11.6	12.2
12H	4H	9.4	9.6	9.8	10.0	10.5	10.9	11.2	11.4	11.6	12.1
	6H	9.5	9.7	10.0	10.2	10.7	11.2	11.4	11.7	11.8	12.3
	8H	9.6	9.8	10.1	10.2	10.8	11.3	11.4	11.8	11.9	12.4
Variations with the observer position at spacing:											
S =		1.0H	2.5 / -2.4				1.7 / -1.7				
		1.5H	4.1 / -2.7				3.0 / -2.0				
		2.0H	5.8 / -3.5				4.5 / -2.4				