

Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	70	67	65	70	67	66	64	76
1.0	78	74	71	69	73	71	71	68	81
1.5	82	79	77	75	78	76	76	73	87
2.0	85	83	81	80	82	80	79	77	91
2.5	87	85	84	83	84	83	82	79	94
3.0	88	87	86	85	85	84	83	81	96
4.0	89	88	87	87	87	86	85	83	98
5.0	89	89	88	88	87	87	86	83	99

Curva límite de luminancia

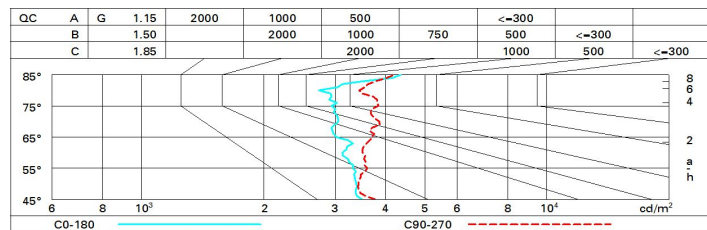


Diagrama UGR

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	10.9	11.4	11.1	11.0	11.9	11.4	11.9	11.7	12.2	12.4
	3H	11.3	11.8	11.6	12.0	12.3	11.5	12.0	11.9	12.3	12.6
	4H	11.5	12.0	11.8	12.3	12.5	11.6	12.0	11.9	12.3	12.6
	6H	11.7	12.1	12.1	12.5	12.8	11.6	12.0	11.9	12.3	12.6
	8H	11.8	12.2	12.2	12.6	12.9	11.5	11.9	11.9	12.3	12.6
	12H	12.0	12.4	12.4	12.7	13.0	11.5	11.9	11.9	12.2	12.6
4H	2H	11.1	11.5	11.4	11.8	12.1	12.4	12.8	12.7	13.1	13.4
	3H	11.7	12.0	12.0	12.4	12.7	12.8	13.2	13.2	13.5	13.9
	4H	12.0	12.4	12.4	12.7	13.1	13.0	13.3	13.4	13.7	14.1
	6H	12.4	12.7	12.8	13.1	13.5	13.1	13.4	13.5	13.8	14.2
	8H	12.5	12.8	13.0	13.2	13.6	13.1	13.4	13.5	13.8	14.2
	12H	12.7	13.0	13.2	13.4	13.9	13.1	13.3	13.5	13.8	14.2
8H	4H	12.2	12.5	12.7	12.9	13.3	13.6	13.8	14.0	14.3	14.7
	6H	12.7	12.9	13.1	13.3	13.8	13.8	14.0	14.3	14.5	15.0
	8H	12.9	13.1	13.4	13.5	14.0	13.9	14.1	14.4	14.6	15.1
	12H	13.2	13.4	13.7	13.9	14.4	13.9	14.1	14.4	14.6	15.1
12H	4H	12.2	12.5	12.7	12.9	13.4	13.7	14.0	14.2	14.4	14.9
	6H	12.7	12.9	13.2	13.3	13.8	14.0	14.2	14.5	14.7	15.2
	8H	13.0	13.1	13.5	13.6	14.1	14.1	14.3	14.6	14.8	15.3
Variations with the observer position at spacing:											
S =		1.0H	1.8 / -1.2				1.3 / -1.1				
		1.5H	3.3 / -1.5				2.7 / -1.3				
		2.0H	4.8 / -1.8				4.1 / -1.6				