

Laser Blade

iGuzzini



iGuzzini

Last information update: March 2025

Product configuration: MQ79.D8
MQ79.D8: 5 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Wide Flood optic - 13W
891lm - 3000K - CRI 90 - White Transparent

Product configuration: MQ79.D8
MQ79.D8: 5 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Wide Flood optic - 13W
891lm - 3000K - CRI 90 - White Transparent

MQ79.D8: 5 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Wide Flood optic - 13W
891lm - 3000K - CRI 90 - White Transparent

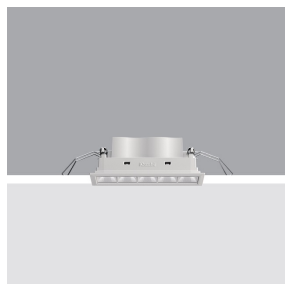

Product code
MQ79.D8: 5 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Wide Flood optic - 13W
891lm - 3000K - CRI 90 - White Transparent

MQ79.D8: 5 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Wide Flood optic - 13W
891lm - 3000K - CRI 90 - White Transparent

<p>Technical description</p> <p>rectangular-miniaturised recessed luminaire with 5 optical elements with LED lamps - fixed optics - wide flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare . Supplied with DALI dimmable electronic control gear connected to the luminaire. Warm white LED</p>

rectangular miniaturised recessed luminaire with 5 optical elements with LED lamps - fixed optics - wide flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare . Supplied with DALI dimmable electronic control gear connected to the luminaire. Warm white LED

Installation
recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141

Colour	Weight (Kg)
White Transparent (D8)	0.4

Colour	Weight (Kg)
White Transparent (D8)	0.4

Weight (Kg)
0.4

0.4

Mounting	wall recessed/ceiling recessed
-----------------	--------------------------------

wall recessed|ceiling recessed

Wiring
on control gear box; screw connections with terminal block included

on control gear box; screw connections with terminal block included


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	924	CRI (typical):	92
W system:	13	Colour temperature [K]:	3000
Im source:	1100	MacAdam Step:	3
W source:	9.9	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, 71.1 real value):		Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	84	Number of optical assemblies:	1
Beam angle [°]:	46°	Control:	DALI-2
CRI (minimum):	90		


Polar

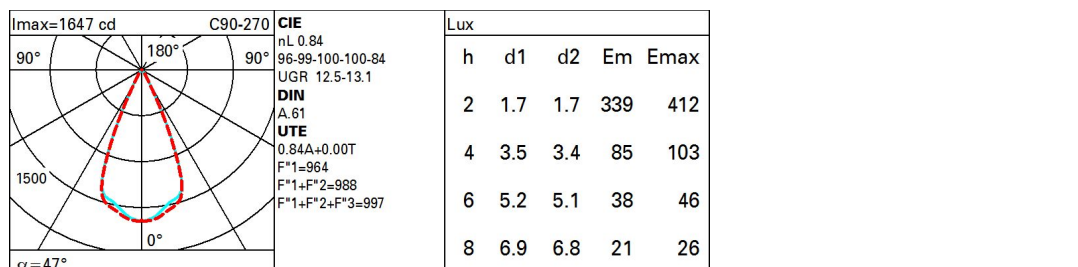

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	70	67	65	70	67	66	64	76
1.0	78	74	71	69	73	71	71	68	81
1.5	82	79	77	75	78	76	76	73	87
2.0	85	83	81	80	82	80	79	77	91
2.5	87	85	84	83	84	83	82	79	94
3.0	88	87	86	85	85	84	83	81	96
4.0	89	88	87	87	87	86	85	83	98
5.0	89	89	88	88	87	87	86	83	99

Luminance curve limit

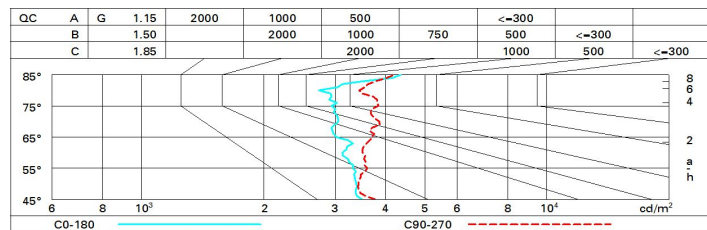

UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	10.9	11.4	11.1	11.0	11.9	11.4	11.9	11.7	12.2	12.4
	3H	11.3	11.8	11.6	12.0	12.3	11.5	12.0	11.9	12.3	12.6
	4H	11.5	12.0	11.8	12.3	12.5	11.6	12.0	11.9	12.3	12.6
	6H	11.7	12.1	12.1	12.5	12.8	11.6	12.0	11.9	12.3	12.6
	8H	11.8	12.2	12.2	12.6	12.9	11.5	11.9	11.9	12.3	12.6
	12H	12.0	12.4	12.4	12.7	13.0	11.5	11.9	11.9	12.2	12.6
4H	2H	11.1	11.5	11.4	11.8	12.1	12.4	12.8	12.7	13.1	13.4
	3H	11.7	12.0	12.0	12.4	12.7	12.8	13.2	13.2	13.5	13.9
	4H	12.0	12.4	12.4	12.7	13.1	13.0	13.3	13.4	13.7	14.1
	6H	12.4	12.7	12.8	13.1	13.5	13.1	13.4	13.5	13.8	14.2
	8H	12.5	12.8	13.0	13.2	13.6	13.1	13.4	13.5	13.8	14.2
	12H	12.7	13.0	13.2	13.4	13.9	13.1	13.3	13.5	13.8	14.2
8H	4H	12.2	12.5	12.7	12.9	13.3	13.6	13.8	14.0	14.3	14.7
	6H	12.7	12.9	13.1	13.3	13.8	13.8	14.0	14.3	14.5	15.0
	8H	12.9	13.1	13.4	13.5	14.0	13.9	14.1	14.4	14.6	15.1
	12H	13.2	13.4	13.7	13.9	14.4	13.9	14.1	14.4	14.6	15.1
12H	4H	12.2	12.5	12.7	12.9	13.4	13.7	14.0	14.2	14.4	14.9
	6H	12.7	12.9	13.2	13.3	13.8	14.0	14.2	14.5	14.7	15.2
	8H	13.0	13.1	13.5	13.6	14.1	14.1	14.3	14.6	14.8	15.3
Variations with the observer position at spacing:											
S =		1.0H					1.8 / -1.2				
		1.5H					3.3 / -1.5				
		2.0H					4.8 / -1.8				
							1.3 / -1.1				
							2.7 / -1.3				
							4.1 / -1.6				