


**Product configuration: MV98**

MV98: Fixed circular recessed luminaire - Ø125 mm - neutral white - flood optic - UGR<19



**MV98:** Fixed circular recessed luminaire - Ø125 mm - neutral white - flood optic - UGR<19 **Attention! Code no longer in production**

**Technical description**  
Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone (3000K). General light emission, with controlled luminance UGR<19 1500 cd/m2  $\alpha$ >65° flood optic.

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

**Colour**  
White / Aluminium (39)

**Weight (Kg)**  
1.02

## ceiling recessed

product complete with an electronic ballast

## TPb rated

Complies with EN60598-1 and pertinent regulations




Im system:	1801	CRI (minimum):	80
W system:	15.4	Colour temperature [K]:	3000
Im source:	2050	MacAdam Step:	2
W source:	13	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	116.9	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	88	Number of optical assemblies:	1
Beam angle [°]:	24°		

<p><math>I_{\max}=4875 \text{ cd}</math></p> <p>90° 180° 90°</p> <p>5000</p> <p>0°</p> <p><math>\alpha = 24^\circ</math></p>	<b>CIE</b>		<b>Lux</b>			
	nL 0.88					
	98-100-100-100-88					
	UGR 17.0-17.0					
	<b>DIN</b>					
	A.61					
<b>UTE</b>						
0.98A+0.00T						
F*1=978						
F*1+F*2=999						
F*1+F*2+F*3=1000						
<b>CIBSE</b>						
LG3 L<1500 cd/m <sup>2</sup> at 65°						
UGR<19   L<1500 cd/m <sup>2</sup> @65°						
	h	d	Em	E <sub>max</sub>		
	2	0.9	921	1219		
	4	1.7	230	305		
	6	2.6	102	135		
	8	3.4	58	76		

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	79	74	71	69	74	71	70	68	77
1.0	82	78	76	73	77	75	75	72	82
1.5	86	84	81	79	83	81	80	77	88
2.0	89	87	85	84	86	84	83	81	92
2.5	91	89	88	87	88	87	86	84	95
3.0	92	91	90	89	89	89	88	85	97
4.0	93	92	92	91	91	90	89	87	99
5.0	94	93	93	92	92	91	90	88	100

# Luminance curve limit

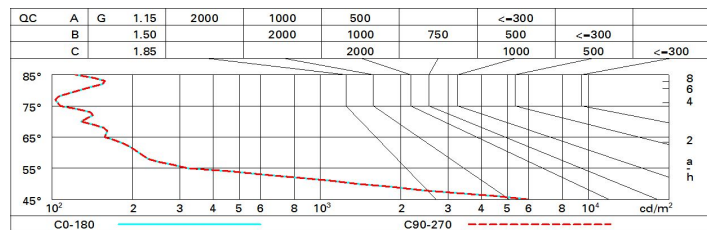

# UGR diagram

Corrected UGR values (at 2050 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x        y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.6	18.2	17.8	18.5	18.7	17.6	18.2	17.8	18.5	18.7
	3H	17.4	18.0	17.7	18.3	18.6	17.4	18.0	17.7	18.3	18.6
	4H	17.3	17.9	17.7	18.2	18.5	17.3	17.9	17.7	18.2	18.5
	6H	17.3	17.8	17.6	18.1	18.4	17.3	17.8	17.6	18.1	18.4
	8H	17.2	17.7	17.6	18.0	18.4	17.2	17.7	17.6	18.0	18.4
	12H	17.2	17.7	17.6	18.0	18.3	17.2	17.7	17.6	18.0	18.3
4H	2H	17.3	17.9	17.7	18.2	18.5	17.3	17.9	17.7	18.2	18.5
	3H	17.2	17.7	17.6	18.0	18.3	17.2	17.7	17.6	18.0	18.3
	4H	17.1	17.5	17.5	17.9	18.3	17.1	17.5	17.5	17.9	18.3
	6H	17.0	17.4	17.4	17.8	18.2	17.0	17.4	17.4	17.8	18.2
	8H	17.0	17.3	17.4	17.7	18.1	17.0	17.3	17.4	17.7	18.1
	12H	16.9	17.2	17.4	17.6	18.1	16.9	17.2	17.4	17.6	18.1
8H	4H	17.0	17.3	17.4	17.7	18.1	17.0	17.3	17.4	17.7	18.1
	6H	16.9	17.1	17.3	17.6	18.1	16.9	17.1	17.3	17.6	18.1
	8H	16.8	17.1	17.3	17.5	18.0	16.8	17.1	17.3	17.5	18.0
	12H	16.8	17.0	17.3	17.5	18.0	16.8	17.0	17.3	17.5	18.0
12H	4H	16.9	17.2	17.4	17.6	18.1	16.9	17.2	17.4	17.6	18.1
	6H	16.8	17.1	17.3	17.5	18.0	16.8	17.1	17.3	17.5	18.0
	8H	16.8	17.0	17.3	17.5	18.0	16.8	17.0	17.3	17.5	18.0
Variations with the observer position at spacing:											
S =	1.0H	4.4 / -24.6					4.4 / -24.6				
	1.5H	7.2 / -25.8					7.2 / -25.8				
	2.0H	9.2 / -26.2					9.2 / -26.2				