
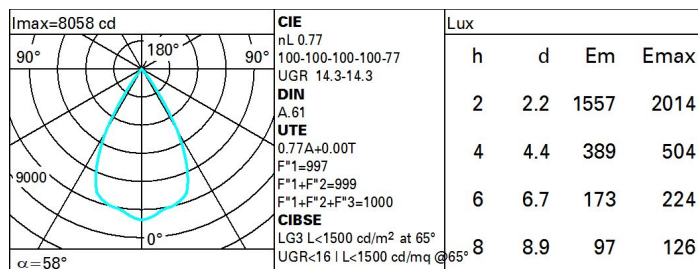


N022: Empotrable circular fijo - Ø 242 mm - neutral white - óptica wide flood - UGR<19



Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	63	61	65	63	63	60	78
1.0	73	69	67	65	69	66	66	64	83
1.5	76	74	72	70	73	71	70	68	89
2.0	78	77	75	74	76	74	74	71	93
2.5	80	79	78	77	77	77	76	74	96
3.0	81	80	79	78	79	78	77	75	98
4.0	82	81	81	80	80	79	78	76	99
5.0	82	82	81	81	81	80	79	77	100

Curva límite de luminancia

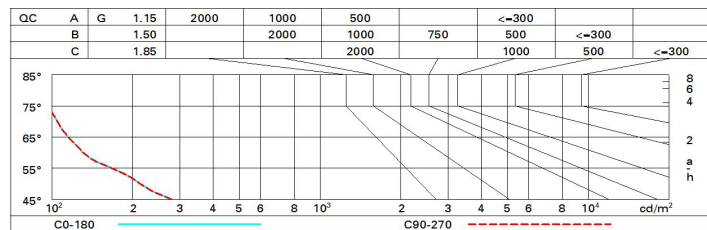


Diagrama UGR

Corrected UGR values (at 8200 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	14.9	15.5	15.1	15.7	15.9	14.9	15.5	15.1	15.7	15.9
	3H	14.7	15.3	15.0	15.5	15.8	14.7	15.3	15.0	15.5	15.8
	4H	14.7	15.2	15.0	15.4	15.7	14.7	15.2	15.0	15.4	15.7
	6H	14.6	15.0	14.9	15.3	15.7	14.6	15.0	14.9	15.3	15.7
	8H	14.5	15.0	14.9	15.3	15.6	14.5	15.0	14.9	15.3	15.6
	12H	14.5	14.9	14.9	15.3	15.6	14.5	14.9	14.9	15.3	15.6
4H	2H	14.7	15.2	15.0	15.4	15.7	14.7	15.2	15.0	15.4	15.7
	3H	14.5	14.9	14.9	15.3	15.6	14.5	14.9	14.9	15.3	15.6
	4H	14.4	14.8	14.8	15.2	15.5	14.4	14.8	14.8	15.2	15.5
	6H	14.3	14.6	14.7	15.0	15.5	14.3	14.6	14.7	15.0	15.5
	8H	14.3	14.6	14.7	15.0	15.4	14.3	14.6	14.7	15.0	15.4
	12H	14.2	14.5	14.7	14.9	15.4	14.2	14.5	14.7	14.9	15.4
8H	4H	14.3	14.6	14.7	15.0	15.4	14.3	14.6	14.7	15.0	15.4
	6H	14.2	14.4	14.6	14.9	15.3	14.2	14.4	14.6	14.9	15.3
	8H	14.1	14.3	14.6	14.8	15.3	14.1	14.3	14.6	14.8	15.3
	12H	14.1	14.3	14.6	14.7	15.3	14.1	14.3	14.6	14.7	15.3
12H	4H	14.2	14.5	14.7	14.9	15.4	14.2	14.5	14.7	14.9	15.4
	6H	14.1	14.3	14.6	14.8	15.3	14.1	14.3	14.6	14.8	15.3
	8H	14.1	14.3	14.6	14.7	15.3	14.1	14.3	14.6	14.7	15.3
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.8					6.5 / -24.8				
	1.5H	9.4 / -25.4					9.4 / -25.4				
	2.0H	11.4 / -25.8					11.4 / -25.8				