

Reflex

Design iGuzzini

iGuzzini

Last information update: May 2025

Product configuration: N099.39

N099.39: adjustable luminaire - Ø 153 mm - warm white - medium optic - frame - 31.2W 2070.3lm - 3000K - CRI 90 - White / Aluminium



Product code

N099.39: adjustable luminaire - Ø 153 mm - warm white - medium optic - frame - 31.2W 2070.3lm - 3000K - CRI 90 - White / Aluminium

Technical description

Round adjustable luminaire designed to use an LED lamp with C.O.B. technology in a warm white colour tone 3000K (CRI 90). Version with rim for surface-mounting. Painted, die-cast aluminium body. Lower reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Anodised aluminium upper reflector. Black, zinc-plated sheet steel bracket. The luminaire can be rotated 30° relative to the horizontal plane and 358° about the vertical axis. The luminaire is fitted with mechanical locks for light beam aiming. Painted extruded aluminium dissipater.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.43

Mounting

ceiling recessed

Wiring

Product complete with DALI components

Notes

Tpa rated


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2070	CRI (minimum):	90
W system:	31.2	Colour temperature [K]:	3000
Im source:	3400	MacAdam Step:	2
W source:	28	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	66.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1
Beam angle [°]:	13° / 14°	Control:	DALI-2


Polar

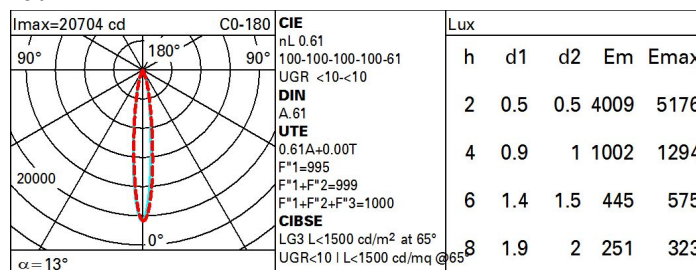

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	55	52	50	49	52	50	49	48	78
1.0	57	55	53	52	54	53	52	50	83
1.5	60	58	57	56	58	56	56	54	88
2.0	62	61	60	59	60	59	58	57	93
2.5	63	62	61	61	61	61	60	58	96
3.0	64	63	63	62	62	62	61	59	98
4.0	65	64	64	63	63	63	62	60	99
5.0	65	65	64	64	64	63	62	61	100

Luminance curve limit

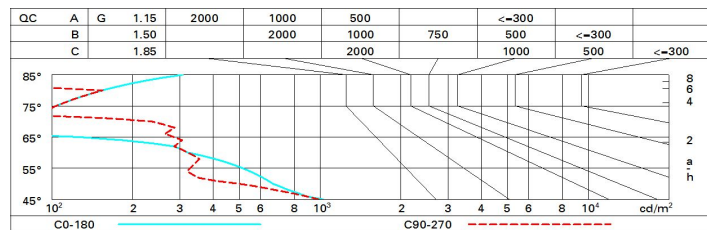

UGR diagram

Corrected UGR values (at 3400 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	-2.0	-0.5	-2.3	-0.2	0.1	-0.3	1.8	0.1	2.1	2.5
	3H	-2.7	-1.3	-2.4	-1.0	-0.6	-0.4	1.1	-0.0	1.4	1.7
	4H	-2.8	-1.6	-2.4	-1.3	-1.0	-0.4	0.7	-0.1	1.0	1.4
	6H	-2.7	-1.9	-2.4	-1.6	-1.3	-0.4	0.3	-0.1	0.7	1.0
	8H	-2.7	-1.9	-2.3	-1.5	-1.2	-0.5	0.3	-0.1	0.7	1.0
	12H	-2.7	-1.8	-2.3	-1.5	-1.1	-0.6	0.3	-0.2	0.7	1.0
4H	2H	-2.8	-1.6	-2.4	-1.3	-1.0	-0.4	0.7	-0.0	1.0	1.4
	3H	-2.9	-2.0	-2.5	-1.6	-1.3	-0.5	0.3	-0.2	0.7	1.1
	4H	-3.0	-2.0	-2.6	-1.6	-1.2	-0.7	0.3	-0.3	0.7	1.1
	6H	-3.3	-1.6	-2.8	-1.1	-0.6	-1.1	0.7	-0.6	1.1	1.6
	8H	-3.3	-1.3	-2.8	-0.9	-0.4	-1.2	0.7	-0.7	1.2	1.7
	12H	-3.2	-1.2	-2.6	-0.7	-0.2	-1.3	0.7	-0.8	1.2	1.7
8H	4H	-3.5	-1.6	-3.0	-1.1	-0.6	-1.2	0.8	-0.7	1.2	1.7
	6H	-3.4	-1.7	-2.9	-1.2	-0.7	-1.2	0.5	-0.7	1.0	1.5
	8H	-3.1	-1.7	-2.6	-1.2	-0.7	-1.2	0.3	-0.7	0.8	1.3
	12H	-2.6	-1.7	-2.1	-1.2	-0.6	-1.0	-0.1	-0.5	0.4	1.0
12H	4H	-3.6	-1.6	-3.1	-1.1	-0.6	-1.2	0.7	-0.7	1.2	1.7
	6H	-3.4	-1.9	-2.9	-1.4	-0.9	-1.2	0.3	-0.7	0.8	1.3
	8H	-2.9	-2.0	-2.4	-1.5	-0.9	-1.0	-0.1	-0.5	0.4	1.0
Variations with the observer position at spacing:											
S =		1.0H					3.6 / -3.8				
		1.5H					6.1 / -4.7				
		2.0H					8.0 / -5.0				
							6.4 / -9.1				
							9.1 / -9.8				
							11.1 / -10.1				