
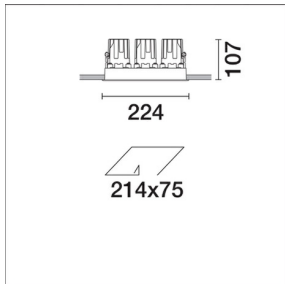


Design iGuzzini iGuzzini

**Product configuration: N169.47**  
N169.47: Fixed, three compartment Recessed luminaire - Neutral LED - Incorporated DALI dimmable power supply - WideFlood optic Beam - White/Black



N169.47: Fixed, three compartment Recessed luminaire - Neutral LED - Incorporated DALI dimmable power supply - WideFlood optic Beam - White/Black

Fixed optic, three compartment recessed luminaire for high efficiency, neutral white LED lamps. Passive heat dissipation system. Lamp body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition optics, integrated in a rear position in the anti-glare screens. Glass covers for LED lamps. The structure of the optical system produces light emission with controlled luminance ( $UGR < 19$ ). Supplied with DALI dimmable power supply unit connected to the luminaire.

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 75 x 214. Installation permitted in either a horizontal or vertical position.

Weight (Kg)  
1.5

wall recessed|ceiling recessed

Quick-fit power supply connection to terminal block. Digital electronic cabling that allows dimming to be performed with DALI protocol or a pushbutton switch (DIM SWITCH).

The product with its white finish (01) includes optic rings for limiting luminance; a feature that renders a performance of UGR < 19 and determines slight variations in the opening of the optics (52°) and yield (0.74).



 On the visible part of the product once installed
 








Im system:	3195	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	28.4	Voltage [Vin]:	230
Im source:	3900	Lamp code:	LED
W source:	25	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	112.5	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	82	Inrush current:	10 A / 200 µs
Beam angle [°]:	54°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 18 luminaires B16A: 30 luminaires C10A: 31 luminaires C16A: 51 luminaires
CRI (minimum):	80	Minimum dimming %:	1
Colour temperature [K]:	4000	Overvoltage protection:	5kV Common mode & 4kV Differential mode
MacAdam Step:	2	Control:	DALI-2

	<b>Imax=4576 cd</b> <b>CIE</b> nL 0.82 100-100-100-100-82 UGR 12.0-12.0 <b>DIN</b> A.61 <b>UTE</b> 0.82A+0.00T F*1=997 F*1+F*2=999 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m <sup>2</sup> at 65° UGR<16   L<1500 cd/mq @65°		<b>Lux</b>			
	<b>h</b>	<b>d</b>	<b>Em</b>	<b>E<sub>max</sub></b>		
	2	2	914	1144		
	4	4.1	228	286		
	6	6.1	102	127		
8	8.2	57	72			

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	68	65	69	67	67	64	78
1.0	77	74	71	69	73	71	70	68	83
1.5	81	78	76	75	77	76	75	73	89
2.0	83	82	80	79	81	79	78	76	93
2.5	85	84	83	82	82	81	81	78	96
3.0	86	85	84	84	84	83	82	80	98
4.0	87	86	86	85	85	85	83	81	99
5.0	88	87	87	86	86	85	84	82	100

# Luminance curve limit

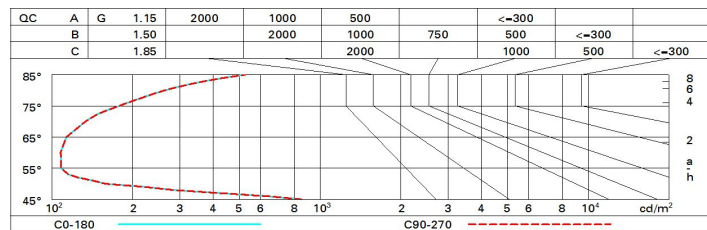

# UGR diagram

Corrected UGR values (at 3900 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	12.6	13.0	12.8	13.2	13.5	12.6	13.0	12.8	13.2	13.5
	3H	12.5	12.8	12.8	13.1	13.4	12.5	12.8	12.8	13.1	13.4
	4H	12.4	12.8	12.7	13.0	13.3	12.4	12.8	12.7	13.0	13.3
	6H	12.3	12.7	12.7	13.0	13.3	12.3	12.6	12.6	13.0	13.3
	8H	12.3	12.6	12.6	12.9	13.3	12.3	12.6	12.6	12.9	13.3
	12H	12.2	12.6	12.6	12.9	13.2	12.2	12.5	12.6	12.9	13.2
4H	2H	12.4	12.8	12.7	13.0	13.3	12.4	12.8	12.7	13.0	13.3
	3H	12.2	12.6	12.6	12.9	13.2	12.2	12.6	12.6	12.9	13.2
	4H	12.1	12.4	12.5	12.8	13.2	12.1	12.4	12.5	12.8	13.2
	6H	12.1	12.3	12.5	12.7	13.1	12.1	12.3	12.5	12.7	13.1
	8H	12.0	12.2	12.4	12.6	13.1	12.0	12.2	12.4	12.6	13.1
	12H	12.0	12.2	12.4	12.6	13.1	12.0	12.2	12.4	12.6	13.0
8H	4H	12.0	12.2	12.4	12.6	13.1	12.0	12.2	12.4	12.6	13.1
	6H	11.9	12.1	12.4	12.5	13.0	11.9	12.1	12.4	12.5	13.0
	8H	11.9	12.0	12.3	12.5	13.0	11.9	12.0	12.3	12.5	13.0
	12H	11.8	12.0	12.3	12.4	13.0	11.8	11.9	12.3	12.4	12.9
12H	4H	12.0	12.2	12.4	12.6	13.0	12.0	12.2	12.4	12.6	13.1
	6H	11.9	12.0	12.3	12.5	13.0	11.9	12.0	12.3	12.5	13.0
	8H	11.8	11.9	12.3	12.4	12.9	11.8	12.0	12.3	12.4	13.0
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -17.3					6.5 / -17.3				
	1.5H	9.3 / -17.4					9.3 / -17.4				
	2.0H	11.3 / -17.6					11.3 / -17.6				