


Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	68	65	69	67	67	64	78
1.0	77	74	71	69	73	71	70	68	83
1.5	81	78	76	75	77	76	75	73	89
2.0	83	82	80	79	81	79	78	76	93
2.5	85	84	83	82	82	81	81	78	96
3.0	86	85	84	84	84	83	82	80	98
4.0	87	86	86	85	85	85	83	81	99
5.0	88	87	87	86	86	85	84	82	100

Luminance curve limit

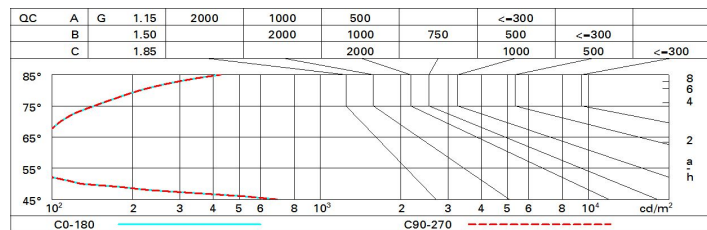

UGR diagram

Corrected UGR values (at 3150 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	11.8	12.3	12.1	12.5	12.7	11.8	12.3	12.1	12.5	12.7
	3H	11.7	12.1	12.0	12.4	12.6	11.7	12.1	12.0	12.4	12.6
	4H	11.6	12.0	12.0	12.3	12.6	11.6	12.0	12.0	12.3	12.6
	6H	11.6	11.9	11.9	12.2	12.5	11.6	11.9	11.9	12.2	12.5
	8H	11.5	11.9	11.9	12.2	12.5	11.5	11.9	11.9	12.2	12.5
	12H	11.5	11.8	11.9	12.1	12.5	11.5	11.8	11.9	12.1	12.5
4H	2H	11.6	12.0	12.0	12.3	12.6	11.6	12.0	12.0	12.3	12.6
	3H	11.5	11.8	11.9	12.1	12.5	11.5	11.8	11.9	12.1	12.5
	4H	11.4	11.7	11.8	12.0	12.4	11.4	11.7	11.8	12.0	12.4
	6H	11.3	11.6	11.7	12.0	12.4	11.3	11.6	11.7	12.0	12.4
	8H	11.3	11.5	11.7	11.9	12.3	11.3	11.5	11.7	11.9	12.3
	12H	11.2	11.4	11.7	11.9	12.3	11.2	11.4	11.7	11.8	12.3
8H	4H	11.3	11.5	11.7	11.9	12.3	11.3	11.5	11.7	11.9	12.3
	6H	11.2	11.4	11.6	11.8	12.3	11.2	11.4	11.6	11.8	12.3
	8H	11.1	11.3	11.6	11.7	12.2	11.1	11.3	11.6	11.7	12.2
	12H	11.1	11.2	11.6	11.7	12.2	11.1	11.2	11.6	11.7	12.2
12H	4H	11.2	11.4	11.7	11.8	12.3	11.2	11.4	11.7	11.9	12.3
	6H	11.1	11.3	11.6	11.7	12.2	11.1	11.3	11.6	11.7	12.2
	8H	11.1	11.2	11.6	11.7	12.2	11.1	11.2	11.6	11.7	12.2
Variations with the observer position at spacing:											
S =		1.0H					0.5 / -17.3				
		1.5H					9.3 / -17.4				
		2.0H					11.3 / -17.6				