


Last information update: May 2025

**Product configuration: N364+N370.04**

N364: Initial module L 2405Frame

N370.04: Plate - wall washer - ON-OFF - LED warm - L 1196 - 17W 2900lm - 3000K - Black

**Product code**N364: Initial module L 2405Frame **Attention! Code no longer in production****Technical description**

Frame version extruded aluminium initial profile with contact frame; a double length version designed to house 2 x Wall Washer emission LED plates.

**Installation**

Recessed using the brackets on the profile. The initial modules can be used individually if completed with accessory caps and the required LED module.

**Colour**

White (01) | Aluminium (12)

**Weight (Kg)**

5.4

**Mounting**

ceiling recessed|ceiling pendant



**Wiring**

The initial profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks for easier luminaire installation. Set up to house the LED modules required by the system.

**Notes**

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations

**Product code**N370.04: Plate - wall washer - ON-OFF - LED warm - L 1196 - 17W 2900lm - 3000K - Black **Attention! Code no longer in production****Technical description**

LED module set up for housing in iN60 Wall Washer system initial or intermediate profiles. Extruded aluminium heat sink linear element, formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. Supplied with integrated electronic control gear. Warm white LED.

**Installation**

Module insertion on profiles with a mechanical easy-push system (steel snap-on spring).

**Colour**

Black (04)

**Weight (Kg)**

1.94

**Mounting**

ceiling recessed|ceiling surface|ceiling pendant

**Wiring**

Quick coupling terminal block connection for simplified luminaire installation. LED module complete with integrated electronic control gear.

**Notes**


The module houses the specific optic system for wall washer emission; to ensure correct installation consult the instruction leaflet.

Complies with EN60598-1 and pertinent regulations

**Technical data**

|  |      |                                       |                                 |
|--|------|---------------------------------------|---------------------------------|
| lm system:   | 3538 | CRI (minimum):                        | 80                              |
| W system:  | 39.5 | Colour temperature [K]:               | 3000                            |
| lm source:   | 5800 | MacAdam Step:                         | 3                               |
| W source:  | 34   | Life Time LED 1:                      | > 50,000h - L90 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value):            | 89.6 | Lamp code:                            | LED                             |
| lm in emergency mode:                              | -    | Number of lamps for optical assembly: | 1                               |
| Total light flux at or above an angle of 90° [Lm]: | 0    | ZVEI Code:                            | LED                             |
| Light Output Ratio (L.O.R.) [%]:                   | 61   | Number of optical assemblies:         | 1                               |

Polar

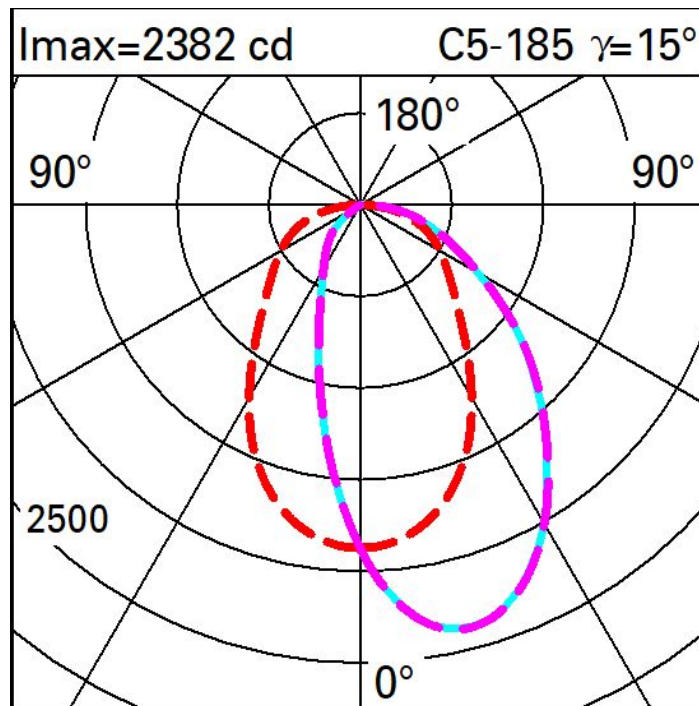

Illuminances

| Lux |    |    |    |     |     |     |     |     |    |    |    | Wall distance = 1m |  |
|-----|----|----|----|-----|-----|-----|-----|-----|----|----|----|--------------------|--|
| 3   |    |    |    |     |     |     |     |     |    |    |    |                    |  |
|     | 11 | 23 | 51 | 120 | 283 | 426 | 283 | 120 | 51 | 23 | 11 |                    |  |
| 2   | 17 | 32 | 65 | 153 | 356 | 485 | 356 | 153 | 65 | 32 | 17 |                    |  |
|     | 18 | 33 | 68 | 152 | 265 | 326 | 265 | 152 | 68 | 33 | 18 |                    |  |
| 1   | 19 | 33 | 64 | 117 | 174 | 202 | 174 | 117 | 64 | 33 | 19 |                    |  |
|     | 18 | 32 | 54 | 84  | 110 | 123 | 110 | 84  | 54 | 32 | 18 |                    |  |
| 0   |    |    |    |     |     |     |     |     |    |    |    |                    |  |
|     | m  | -2 | -1 | 0   | 1   | 2   | 3   |     |    |    |    |                    |  |