


P532: Runde, starre Einbauleuchte - Ø212 mm - Warm White - Flood-Optik - UGR<10




P532 DE 1 / 2

Wirkungsgrad

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	63	67	64	64	62	78
1.0	74	71	68	67	70	68	68	65	83
1.5	78	75	73	72	74	73	72	70	88
2.0	80	78	77	76	77	76	75	73	93
2.5	82	80	79	78	79	78	77	75	96
3.0	83	82	81	80	81	80	79	77	98
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Söller-Diagramm

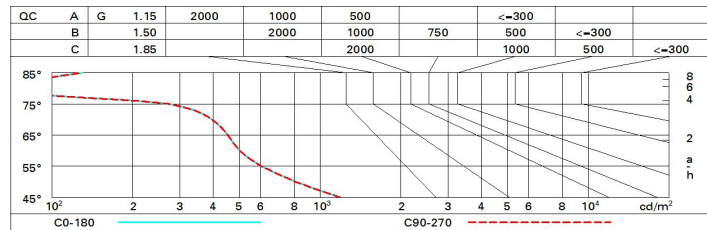

UGR-Diagramm

Corrected UGR values (at 6400 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	1.1	3.2	1.4	3.5	3.9	1.1	3.2	1.4	3.5	3.9
	3H	1.1	2.8	1.5	3.1	3.5	1.0	2.7	1.4	3.0	3.4
	4H	1.1	2.6	1.5	2.9	3.3	1.0	2.4	1.4	2.7	3.1
	6H	1.1	2.2	1.5	2.6	2.9	0.9	2.1	1.3	2.4	2.8
	8H	1.0	2.2	1.4	2.5	2.9	0.9	2.0	1.3	2.4	2.7
	12H	1.0	2.1	1.4	2.4	2.8	0.9	1.9	1.3	2.3	2.7
4H	2H	1.0	2.4	1.4	2.7	3.1	1.1	2.6	1.5	2.9	3.3
	3H	1.1	2.2	1.5	2.6	2.9	1.2	2.2	1.6	2.6	3.0
	4H	1.1	2.1	1.5	2.5	2.9	1.1	2.1	1.5	2.5	2.9
	6H	0.8	2.4	1.2	2.9	3.3	0.8	2.5	1.3	2.9	3.4
	8H	0.6	2.5	1.1	3.0	3.5	0.7	2.5	1.2	3.0	3.5
	12H	0.5	2.5	1.0	3.0	3.5	0.5	2.5	1.1	3.0	3.5
8H	4H	0.7	2.5	1.2	3.0	3.5	0.6	2.5	1.1	3.0	3.5
	6H	0.5	2.4	1.1	2.9	3.4	0.5	2.4	1.1	2.9	3.4
	8H	0.5	2.2	1.0	2.7	3.2	0.5	2.2	1.0	2.7	3.2
	12H	0.7	1.8	1.2	2.3	2.8	0.7	1.7	1.2	2.2	2.8
12H	4H	0.5	2.5	1.1	3.0	3.5	0.5	2.5	1.0	3.0	3.5
	6H	0.5	2.2	1.0	2.7	3.2	0.5	2.2	1.0	2.7	3.2
	8H	0.7	1.7	1.2	2.2	2.8	0.7	1.8	1.2	2.3	2.8
Variations with the observer position at spacing:											
S =	1.0H	5.2 / -4.5					5.2 / -4.5				
	1.5H	7.8 / -5.4					7.8 / -5.4				
	2.0H	9.8 / -5.9					9.8 / -5.9				