

## Platea Pro

Design Jean-Michel  
Wilmotte

iGuzzini

Last information update: November 2024

### Product configuration: P812

P812: Platea Pro



#### Product code

P812: Platea Pro

#### Technical description

Outdoor luminaire with a Wide Flood optic, designed to use LED lamps. Made up of an optical assembly with a base and an aluminium alloy frame. The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. With a 5 mm thick colourless transparent tempered sodium-calcium glass cover. The product can be tilted by +5°/-90° around the vertical plane with a 10° step graduated gauge and fitted with mechanical blocks that guarantee stable aiming of the beam of light. Horizontal aiming is performed using the slots in the base, which allow an  $\pm 30^\circ$  adjustment. High visual comfort. Polymer optic lenses offering high yield and even light distribution. Complete with circuit fitted with Neutral White monochrome power LEDs. Extractable control gear connected with quick-coupling connectors. 220-240V ac 50/60Hz DALI electronic ballast. Replaceable control gear. All the screws used are made of A2 stainless steel.

#### Installation

The luminaire can be installed at ground level or on walls using the standard base.

#### Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

#### Weight (Kg)

8.55

#### Mounting

wall arm|wall surface|ground anchored

#### Wiring

Luminaire ready for pass-through wiring. Product perfect watertightness at the power cable entry point is guaranteed by 2 nickel-plated brass M24x1.5 cable clamps, suitable for cables with a max external 16mm  $\varnothing$  (1.5mm<sup>2</sup> cross section). Push in terminal board.

#### Notes

Available accessories include: a refractor for elliptical light flow distribution, diffusing glass, visor, directional flaps, protective grille .


Complies with EN60598-1 and pertinent regulations




#### Technical data

Im system:	5395	Life Time LED 2:	87,000h - L80 - B10 (Ta 40°C)
W system:	55.4	Lamp code:	LED
Im source:	7200	Number of lamps for optical assembly:	1
W source:	51	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	97.4	Number of optical assemblies:	1
Im in emergency mode:	-	Intervallo temperatura ambiente:	from -30°C to 50°C.
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	75	Inrush current:	62 A / 202 $\mu$ s
Beam angle [°]:	46°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 6 luminaires B16A: 10 luminaires C10A: 10 luminaires C16A: 17 luminaires
CRI (minimum):	80	Minimum dimming %:	10
Colour temperature [K]:	4000	Overvoltage protection:	10kV Common mode & 6kV Differential mode
MacAdam Step:	3	Control:	DALI-2
Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)		

#### Polar

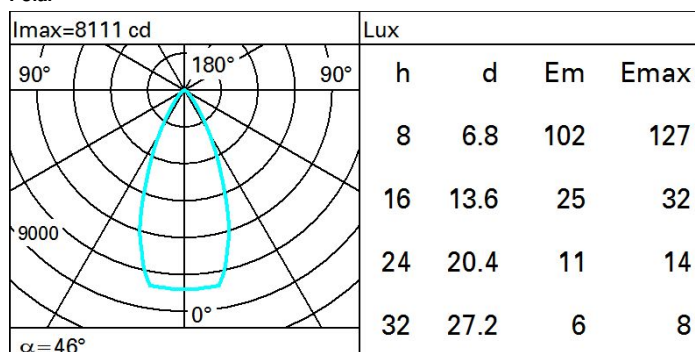

### Isolux

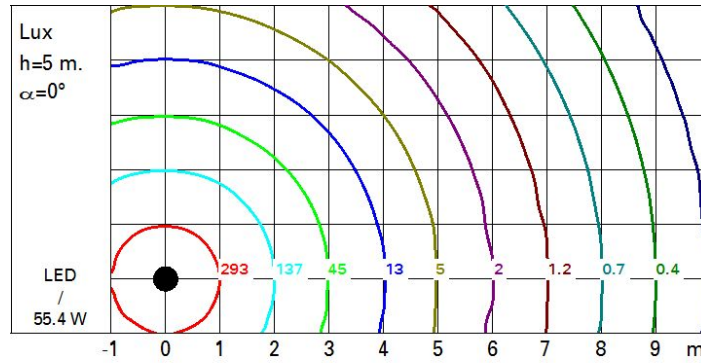

### UGR diagram

Corrected UGR values (at 7200 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	16.7	17.3	16.9	17.5	17.8	16.7	17.3	16.9	17.5	17.8	17.8
	3H	16.8	17.3	17.1	17.6	17.9	16.7	17.3	17.0	17.5	17.8	17.8
	4H	16.8	17.3	17.1	17.6	17.9	16.7	17.2	17.0	17.5	17.8	17.8
	6H	16.7	17.2	17.0	17.5	17.8	16.6	17.1	17.0	17.4	17.7	17.7
	8H	16.7	17.1	17.0	17.5	17.8	16.6	17.0	16.9	17.4	17.7	17.7
	12H	16.6	17.1	17.0	17.4	17.8	16.5	17.0	16.9	17.3	17.7	17.7
4H	2H	16.7	17.2	17.0	17.5	17.8	16.8	17.3	17.1	17.6	17.9	17.9
	3H	16.8	17.3	17.2	17.6	18.0	16.8	17.3	17.2	17.6	18.0	18.0
	4H	16.8	17.2	17.2	17.6	18.0	16.8	17.2	17.2	17.6	18.0	18.0
	6H	16.7	17.1	17.2	17.5	17.9	16.8	17.1	17.2	17.5	17.9	17.9
	8H	16.7	17.0	17.1	17.4	17.9	16.7	17.0	17.2	17.5	17.9	17.9
	12H	16.7	16.9	17.1	17.4	17.8	16.7	17.0	17.1	17.4	17.8	17.8
8H	4H	16.7	17.0	17.2	17.5	17.9	16.7	17.0	17.1	17.4	17.9	17.9
	6H	16.7	16.9	17.1	17.4	17.8	16.7	16.9	17.1	17.4	17.8	17.8
	8H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.3	17.8	17.8
	12H	16.6	16.8	17.1	17.2	17.8	16.6	16.8	17.1	17.2	17.8	17.8
12H	4H	16.7	17.0	17.1	17.4	17.8	16.7	16.9	17.1	17.4	17.8	17.8
	6H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.3	17.8	17.8
	8H	16.6	16.8	17.1	17.2	17.8	16.6	16.8	17.1	17.2	17.8	17.8
Variations with the observer position at spacing:												
S =		1.0H	2.8 / -2.8				2.8 / -2.8					
		1.5H	5.1 / -4.3				5.1 / -4.3					
		2.0H	6.9 / -5.5				6.9 / -5.5					