




# Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	67	63	61	66	63	62	59	70
1.0	76	71	68	65	70	67	67	63	76
1.5	81	77	74	72	76	73	72	69	83
2.0	84	81	79	77	80	78	77	73	88
2.5	86	84	82	80	82	80	79	76	91
3.0	87	85	84	83	84	82	81	78	94
4.0	88	87	86	85	85	84	83	80	96
5.0	89	88	87	87	86	85	84	81	97

## Curva limite di luminanza

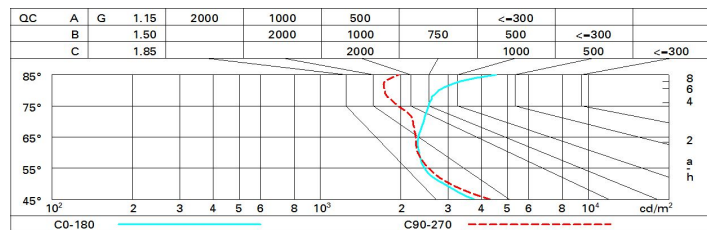

## Diagramma UGR

Corrected UGR values (at 1000 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	14.1	14.7	14.4	15.0	15.3	14.3	15.0	14.7	15.3	15.5
	3H	14.5	15.1	14.9	15.4	15.7	14.3	14.9	14.7	15.2	15.5
	4H	14.8	15.4	15.2	15.7	16.0	14.3	14.9	14.7	15.2	15.5
	6H	15.1	15.6	15.5	16.0	16.4	14.3	14.8	14.7	15.1	15.5
	8H	15.3	15.8	15.7	16.2	16.6	14.3	14.8	14.7	15.1	15.5
	12H	15.6	16.1	16.0	16.4	16.8	14.2	14.7	14.6	15.1	15.5
4H	2H	14.1	14.6	14.4	14.9	15.3	14.8	15.4	15.2	15.7	16.0
	3H	14.7	15.1	15.1	15.5	15.9	15.0	15.4	15.4	15.8	16.2
	4H	15.1	15.5	15.5	15.9	16.3	15.0	15.4	15.5	15.8	16.3
	6H	15.6	15.9	16.0	16.4	16.8	15.1	15.5	15.6	15.9	16.3
	8H	15.9	16.2	16.3	16.7	17.1	15.1	15.4	15.6	15.9	16.4
	12H	16.3	16.6	16.8	17.0	17.5	15.1	15.4	15.6	15.9	16.4
8H	4H	15.2	15.5	15.6	15.9	16.4	15.3	15.7	15.8	16.1	16.6
	6H	15.8	16.1	16.3	16.6	17.1	15.5	15.8	16.0	16.3	16.8
	8H	16.2	16.5	16.7	17.0	17.5	15.6	15.8	16.1	16.3	16.9
	12H	16.8	17.0	17.4	17.5	18.1	15.7	15.9	16.2	16.4	17.0
12H	4H	15.1	15.4	15.6	15.9	16.4	15.4	15.7	15.9	16.2	16.7
	6H	15.8	16.1	16.4	16.6	17.1	15.6	15.9	16.1	16.4	16.9
	8H	16.3	16.5	16.9	17.1	17.6	15.8	16.0	16.3	16.5	17.1
Variations with the observer position at spacing:											
S =	1.0H	1.8 / -1.1					2.3 / -1.7				
	1.5H	3.5 / -1.3					4.4 / -2.0				
	2.0H	5.1 / -1.4					6.1 / -2.1				