

Last information update: October 2024

**Product configuration: Q165**

Q165: Fixed circular recessed luminaire - Ø125 mm - warm white - medium optic - UGR&lt;19

**Product code**

Q165: Fixed circular recessed luminaire - Ø125 mm - warm white - medium optic - UGR&lt;19

**Technical description**

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone (3000K). General light emission, with controlled luminance UGR<19 1500 cd/m<sup>2</sup> α>65° medium optic.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

**Colour**

White / Aluminium (39)

**Mounting**

ceiling recessed

**Wiring**

product complete with TRIAC components

Complies with EN60598-1 and pertinent regulations




IP20

IP54

On the visible part of the product once installed



pending

**Technical data**

lm system:	2723	CRI (minimum):	90
W system:	27.5	Colour temperature [K]:	3000
lm source:	3100	MacAdam Step:	2
W source:	25	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	99	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	88	Number of optical assemblies:	1
Beam angle [°]:	24°	Control:	TRIAC


**Polar**

Imax=7372 cd		CIE		Lux			
90°	180°	nL 0.88		h	d	Em	Emax
		98-100-100-100-88		2	0.9	1393	1843
		UGR 18.4-18.4		4	1.7	348	461
		<b>DIN</b>		6	2.6	155	205
		A 61		8	3.4	87	115
		<b>UTE</b>					
		0.88A+0.00T					
		F*1=97.8					
		F*1+F*2=999					
		F*1+F*2+F*3=1000					
		<b>CIBSE</b>					
		LG3 L<1500 cd/m <sup>2</sup> at 65°					
		UGR<19   L<1500 cd/mq @ 65°					
α=24°							

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	79	74	71	69	74	71	70	68	77
1.0	82	78	76	73	77	75	75	72	82
1.5	86	84	81	79	83	81	80	77	88
2.0	89	87	85	84	86	84	83	81	92
2.5	91	89	88	87	88	87	86	84	95
3.0	92	91	90	89	89	89	88	85	97
4.0	93	92	92	91	91	90	89	87	99
5.0	94	93	93	92	92	91	90	88	100

# Luminance curve limit

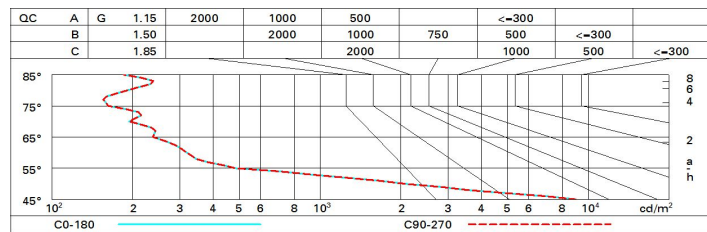

# UGR diagram

Corrected UGR values (at 3100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	19.0	19.7	19.3	19.9	20.1	19.0	19.7	19.3	19.9	20.1
	3H	18.9	19.4	19.2	19.7	20.0	18.9	19.4	19.2	19.7	20.0
	4H	18.8	19.3	19.1	19.6	19.9	18.8	19.3	19.1	19.6	19.9
	6H	18.7	19.2	19.1	19.5	19.8	18.7	19.2	19.1	19.5	19.8
	8H	18.7	19.2	19.0	19.5	19.8	18.7	19.2	19.0	19.5	19.8
	12H	18.6	19.1	19.0	19.4	19.8	18.6	19.1	19.0	19.4	19.8
4H	2H	18.8	19.3	19.1	19.6	19.9	18.8	19.3	19.1	19.6	19.9
	3H	18.6	19.1	19.0	19.4	19.8	18.6	19.1	19.0	19.4	19.8
	4H	18.5	18.9	18.9	19.3	19.7	18.5	18.9	18.9	19.3	19.7
	6H	18.5	18.8	18.9	19.2	19.6	18.5	18.8	18.9	19.2	19.6
	8H	18.4	18.7	18.8	19.1	19.6	18.4	18.7	18.8	19.1	19.6
	12H	18.4	18.7	18.8	19.1	19.5	18.4	18.7	18.8	19.1	19.5
8H	4H	18.4	18.7	18.8	19.1	19.6	18.4	18.7	18.8	19.1	19.6
	6H	18.3	18.6	18.8	19.0	19.5	18.3	18.6	18.8	19.0	19.5
	8H	18.3	18.5	18.7	19.0	19.5	18.3	18.5	18.7	19.0	19.5
	12H	18.2	18.4	18.7	18.9	19.4	18.2	18.4	18.7	18.9	19.4
12H	4H	18.4	18.7	18.8	19.1	19.5	18.4	18.7	18.8	19.1	19.5
	6H	18.3	18.5	18.7	19.0	19.5	18.3	18.5	18.7	19.0	19.5
	8H	18.2	18.4	18.7	18.9	19.4	18.2	18.4	18.7	18.9	19.4
Variations with the observer position at spacing:											
S =	1.0H	4.4 / -24.6					4.4 / -24.6				
	1.5H	7.2 / -25.8					7.2 / -25.8				
	2.0H	9.2 / -26.2					9.2 / -26.2				