

Last information update: May 2025

Product configuration: Q356+Q410.12

Q356: Frame initial moduleGeneral Down LightL 612

Q410.12: Plate - General Down Light - Warm LED - L 598 - 3000K - CRI 80 - Aluminium

**Product code**Q356: Frame initial moduleGeneral Down LightL 612 **Attention! Code no longer in production****Technical description**

Initial profile in extruded aluminium - Frame version with contact frame; methacrylate opal screen (diffused general light); screen set up for connecting several lengths by overlapping.

Installation

Recessed using the brackets on the profile. The initial modules can be used individually if completed with accessory caps and the required LED module.

Colour

White (01) | Aluminium (12)

Weight (Kg)

2

Mounting

ceiling recessed

Wiring

Set up to house the LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

TPb rated. TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations

**Product code**Q410.12: Plate - General Down Light - Warm LED - L 598 - 3000K - CRI 80 - Aluminium **Attention! Code no longer in production****Technical description**

LED module set up for housing in initial or intermediate system profiles - down emission. Electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00) | White (01)

Weight (Kg)

0.81

Wiring


Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1850	Colour temperature [K]:	3000
W system:	17.4	MacAdam Step:	3
Im source:	2500	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	15	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	106.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	74	Number of optical assemblies:	1
CRI (minimum):	80		

Polar

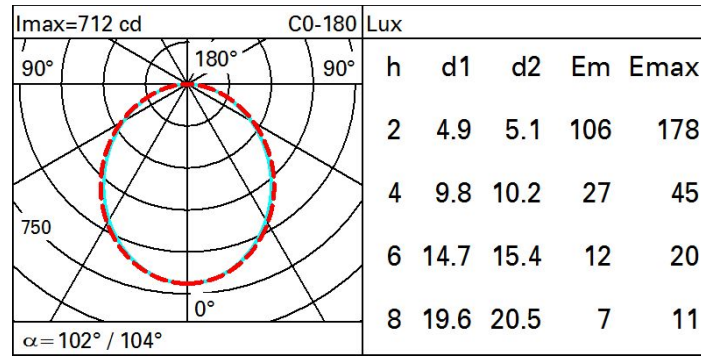

Isolux

