

Last information update: November 2024

Product configuration: Q371+QH92.12

Q371: Minimal continuous line moduleGeneral Up/Down LightL 3594

QH92.12: Plate - Up / Down - General Light - DALI - Warm LED - L 3588 - 149W 15062lm - 3000K - Aluminium

**Product code**

Q371: Minimal continuous line moduleGeneral Up/Down LightL 3594

Technical description

Extruded aluminium intermediate profile - Minimal (frameless) version for flush with ceiling mounting and up-down emission; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

Colour

White (01) | Aluminium (12)

Weight (Kg)

8.45

Mounting

wall surface

Wiring

Set up to house the up-down LED modules required by the system.

Notes

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



IP20

**Product code**

QH92.12: Plate - Up / Down - General Light - DALI - Warm LED - L 3588 - 149W 15062lm - 3000K - Aluminium

Technical description

LED module set up for housing in initial or intermediate system profiles, ideal for particularly long light lines. Up + down emission for General Light profiles (with lower opal diffuser screen). DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm 3000K LED

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00)

Weight (Kg)

4.9

Wiring

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI control gear.

Notes

Important: the triple length intermediate luminous module can be used for both initial profiles - L 3594 - for stand-alone applications, and intermediate profiles - L 3594 - for continuous line applications.

Complies with EN60598-1 and pertinent regulations




IP20

**Technical data**

Im system:	15062	Colour temperature [K]:	3000
W system:	149	MacAdam Step:	3
Im source:	22150	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	134	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	101.1	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	4267	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	68	Number of optical assemblies:	1
CRI (minimum):	80		

Polar

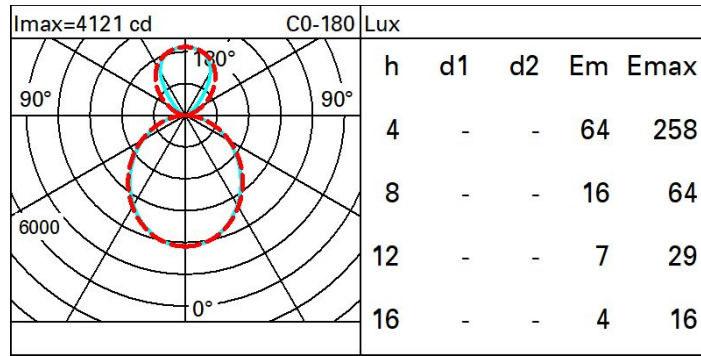

Isolux

