

Last information update: November 2024

### Product configuration: Q371+Q419.12

Q371: Minimal continuous line module General Up/Down Light L 3594

Q419.12: Plate - General Up / Down Light - DALI - Warm LED - L 1196 - 50.7W 5134lm - 3000K - Aluminium



#### Product code

Q371: Minimal continuous line module General Up/Down Light L 3594

#### Technical description

Extruded aluminium intermediate profile - Minimal (frameless) version for flush with ceiling mounting and up-down emission; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

#### Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

#### Colour

White (01) | Aluminium (12)

#### Weight (Kg)

8.45

#### Mounting

wall surface

#### Wiring

Set up to house the up-down LED modules required by the system.

#### Notes

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



#### Product code

Q419.12: Plate - General Up / Down Light - DALI - Warm LED - L 1196 - 50.7W 5134lm - 3000K - Aluminium

#### Technical description

LED module set up for housing in initial or intermediate system profiles - up + down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

#### Installation

Module insertion on profiles facilitated by a quick coupling system.

#### Colour

Indeterminate (00)

#### Weight (Kg)

1.4

#### Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.


Complies with EN60598-1 and pertinent regulations



#### Technical data

lm system:	16410	CRI (minimum):	80
W system:	175.5	Colour temperature [K]:	3000
lm source:	25250	MacAdam Step:	3
W source:	160	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	93.5	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	4862	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	65	Number of optical assemblies:	1

Polar

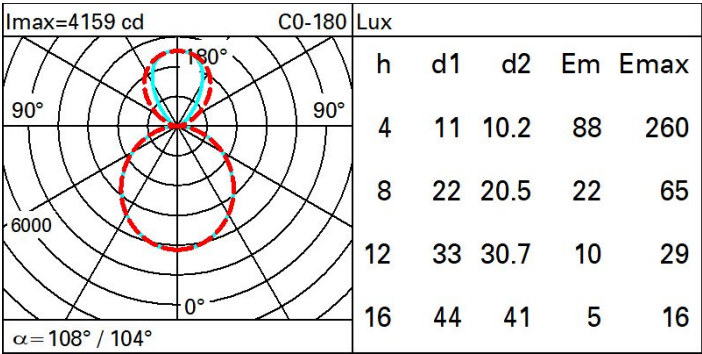

Isolux

