

Last information update: November 2024

**Product configuration: Q371+Q418.12**

Q371: Minimal continuous line moduleGeneral Up/Down LightL 3594

Q418.12: Plate - General Up / Down Light - ON-OFF - Warm LED - L 1196 - 51.6W 5134lm - 3000K - Aluminium

**Product code**

Q371: Minimal continuous line moduleGeneral Up/Down LightL 3594

**Technical description**

Extruded aluminium intermediate profile - Minimal (frameless) version for flush with ceiling mounting and up-down emission; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

**Installation**

Installation can be pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

**Colour**

White (01) | Aluminium (12)

**Weight (Kg)**

8.45

**Mounting**

wall surface

**Wiring**

Set up to house the up-down LED modules required by the system.

**Notes**

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



IP20

**Product code**Q418.12: Plate - General Up / Down Light - ON-OFF - Warm LED - L 1196 - 51.6W 5134lm - 3000K - Aluminium **Attention! Code no longer in production****Technical description**

LED module set up for housing in initial or intermediate system profiles - up + down emission. Electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

**Installation**

Module insertion on profiles facilitated by a quick coupling system.

**Colour**

Indeterminate (00) | White (01)

**Weight (Kg)**

1.4

**Wiring**

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations




IP20

**Technical data**

Im system:	16410	CRI (minimum):	80
W system:	182.7	Colour temperature [K]:	3000
Im source:	25250	MacAdam Step:	3
W source:	160	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	89.8	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	4862	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	65	Number of optical assemblies:	1

# Polar

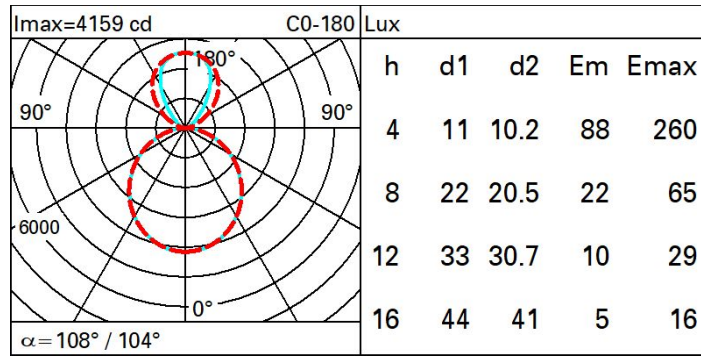

# Isolux

