

Product configuration: Q408+R405.01

Q408: Plate - General Down Light - Neutral LED - DALI - L 896

R405.01: Minimal continuous line module - General Down Light - L 898 - TP(a) - White

**Product code**

Q408: Plate - General Down Light - Neutral LED - DALI - L 896 **Attention! Code no longer in production**

Technical description

LED module set up for housing in initial or intermediate system profiles - down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Neutral LED.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00) | White (01)

Weight (Kg)

1.2

Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations

**Product code**

R405.01: Minimal continuous line module - General Down Light - L 898 - TP(a) - White

Technical description

Technical description
Minimal (frameless) version extruded aluminium intermediate profile for flush with ceiling mounting; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal screen (diffused general light) in compliance with the TP(a) standard; screen set up for connecting several lengths by overlapping.

Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

Colour

White (01)*

Weight (Kq)

1.9

* Colours on request

Mounting

ceiling recessed|wall surface|ceiling surface|ceiling pendant

Wiring

Set up to house the LED modules required by the system.

Notes

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2511	Colour temperature [K]:	4000
W system:	25.3	MacAdam Step:	3
Im source:	4050	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	99.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	62	Number of optical assemblies:	1
CRI (minimum):	80	Control:	DALI-2

Polar

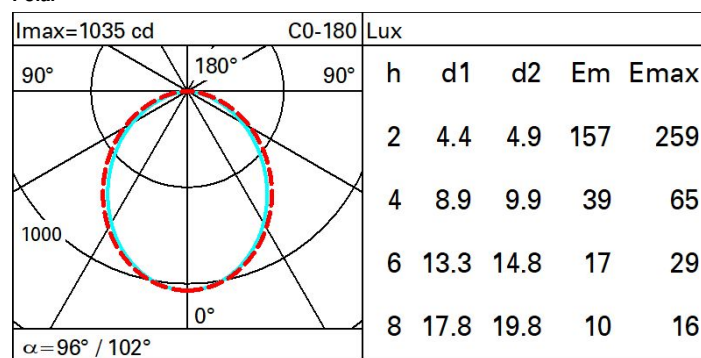

Isolux

