

Last information update: December 2024

### Product configuration: Q417+Q368.01

Q417: Plate - General Up / Down Light - DALI - Neutral LED - L 1196

Q368.01: Minimal initial module - General Up/Down Light - L 1208 - White



#### Product code

Q417: Plate - General Up / Down Light - DALI - Neutral LED - L 1196

#### Technical description

LED module set up for housing in initial or intermediate system profiles - up + down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Neutral LED.

#### Installation

Module insertion on profiles facilitated by a quick coupling system.

#### Colour

Indeterminate (00)

#### Weight (Kg)

1.4

#### Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations



#### Product code

Q368.01: Minimal initial module - General Up/Down Light - L 1208 - White

#### Technical description

Initial profile in extruded aluminium - Minimal (frameless) version for flush with ceiling mounting and up-down emission; methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

#### Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

#### Colour

White (01)

#### Weight (Kg)

3.1

#### Mounting

wall surface|ceiling pendant

#### Wiring

Set up to house the up-down LED modules required by the system.

#### Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.


Complies with EN60598-1 and pertinent regulations



#### Technical data

Im system:	5474	Colour temperature [K]:	4000
W system:	50.7	MacAdam Step:	3
Im source:	8050	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	45	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	108	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	1551	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	68	Number of optical assemblies:	1
CRI (minimum):	80	Control:	DALI-2

# Polar

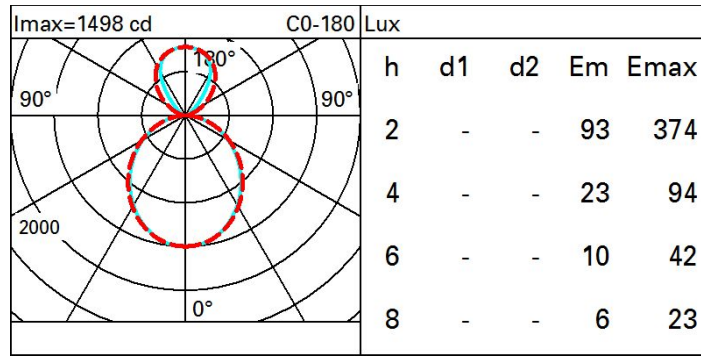

# Isolux

