

Last information update: May 2025

Product configuration: Q417+Q371.01

Q417: Plate - General Up / Down Light - DALI - Neutral LED - L 1196

Q371.01: Minimal continuous line module - General Up/Down Light - L 3594 - White

**Product code**

Q417: Plate - General Up / Down Light - DALI - Neutral LED - L 1196 **Attention! Code no longer in production**

Technical description

LED module set up for housing in initial or intermediate system profiles - up + down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Neutral LED.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00) | White (01)

Weight (Kg)

1.4

Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations

**Product code**

Q371.01: Minimal continuous line module - General Up/Down Light - L 3594 - White **Attention! Code no longer in production**

Technical description

Extruded aluminium intermediate profile - Minimal (frameless) version for flush with ceiling mounting and up-down emission; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

Colour

White (01)

Weight (Kg)

8.45

Mounting

wall surface

Wiring

Set up to house the up-down LED modules required by the system.

Notes


Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	17385	Colour temperature [K]:	4000
W system:	175.5	MacAdam Step:	3
lm source:	26750	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	160	Lamp code:	LED
Luminous efficiency (lm/W, real value):	99.1	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	5151	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	65	Control:	DALI-2
CRI (minimum):	80		

Polar

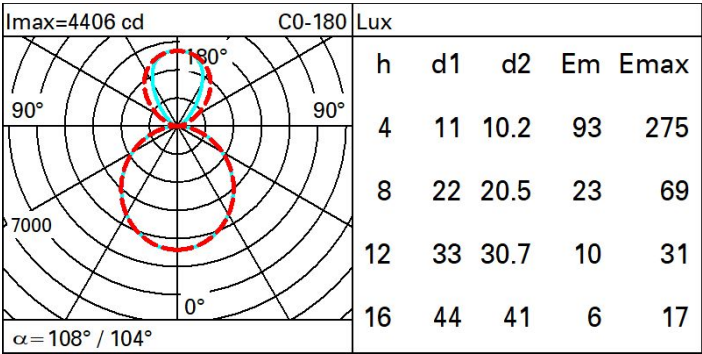

Isolux

