

QH95.12: Plaque - Down - Office / Working UGR < 19 - ON-OFF - LED Warm - L 3588 - 45.5W 5470lm - 3000K - Aluminium



Conforme à la norme EN60598-1 et à la réglementation en vigueur (o 'à la réglementation relative')




4.1

Conforme à la norme EN60598-1 et à la réglementation en vigueur (o 'à la réglementation relative')



Polaire

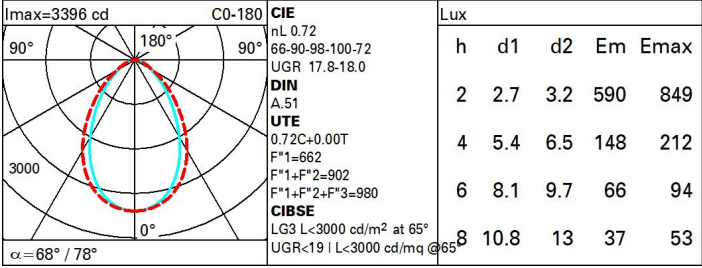

Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	47	43	40	47	43	42	38	53
1.0	58	52	48	45	51	48	47	43	60
1.5	64	60	56	53	59	56	55	51	71
2.0	68	64	61	59	63	61	60	56	78
2.5	70	67	65	63	66	64	63	60	83
3.0	71	69	67	65	68	66	65	62	86
4.0	73	71	70	68	70	68	67	64	89
5.0	74	72	71	70	71	70	69	66	91

Courbe limite de luminance

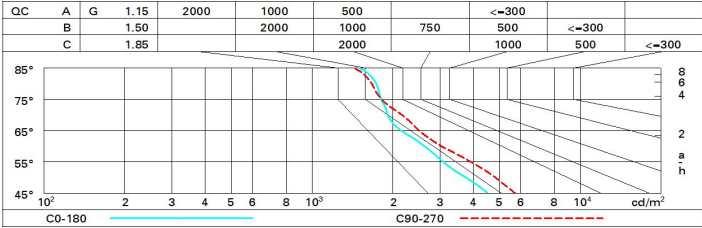


Diagramme UGR

Corrected UGR values (at 7550 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	15.5	16.5	15.8	16.7	17.0	16.6	17.5	16.9	17.8	18.1
	3H	16.2	17.1	16.5	17.4	17.7	16.8	17.6	17.1	17.9	18.2
	4H	16.5	17.4	16.9	17.7	18.0	16.8	17.6	17.2	17.9	18.3
	6H	16.8	17.6	17.2	17.9	18.2	16.8	17.5	17.2	17.9	18.2
	8H	16.9	17.7	17.3	18.0	18.3	16.8	17.5	17.1	17.8	18.2
	12H	17.0	17.7	17.4	18.0	18.4	16.7	17.4	17.1	17.8	18.1
4H	2H	15.9	16.7	16.2	17.0	17.3	17.4	18.3	17.8	18.6	18.9
	3H	16.8	17.5	17.2	17.8	18.2	17.8	18.5	18.2	18.9	19.2
	4H	17.2	17.8	17.6	18.2	18.6	17.9	18.6	18.3	18.9	19.3
	6H	17.6	18.1	18.0	18.5	19.0	18.0	18.6	18.5	19.0	19.4
	8H	17.8	18.3	18.2	18.7	19.1	18.0	18.5	18.5	19.0	19.4
	12H	17.9	18.3	18.3	18.7	19.2	18.0	18.5	18.5	18.9	19.4
8H	4H	17.4	17.9	17.8	18.3	18.7	18.3	18.8	18.8	19.2	19.7
	6H	17.9	18.3	18.4	18.8	19.2	18.5	18.9	19.0	19.4	19.9
	8H	18.1	18.5	18.6	18.9	19.4	18.6	19.0	19.1	19.5	20.0
	12H	18.3	18.6	18.8	19.1	19.6	18.7	19.0	19.2	19.5	20.0
12H	4H	17.4	17.8	17.8	18.2	18.7	18.4	18.8	18.9	19.3	19.7
	6H	17.9	18.3	18.4	18.8	19.3	18.6	19.0	19.1	19.5	20.0
	8H	18.2	18.5	18.7	19.0	19.5	18.8	19.1	19.3	19.6	20.1
Variations with the observer position at spacing:											
S =		1.0H	0.4 / -0.5		0.3 / -0.4						
		1.5H	0.5 / -1.0		0.7 / -1.2						
		2.0H	1.1 / -1.4		1.6 / -1.6						