


QH94.12: Piastra - Down - Office / Working UGR < 19 - DALI - LED Neutral - L 3588 - 45.3W 5796lm - 4000K - Alluminio

Polare

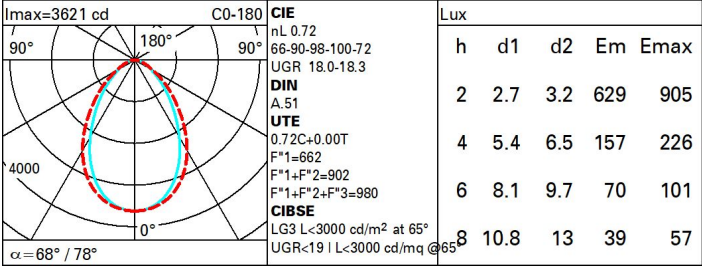

Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	47	43	40	47	43	42	38	53
1.0	58	52	48	45	51	48	47	43	60
1.5	64	60	56	53	59	56	55	51	71
2.0	68	64	61	59	63	61	60	56	78
2.5	70	67	65	63	66	64	63	60	83
3.0	71	69	67	65	68	66	65	62	86
4.0	73	71	70	68	70	68	67	64	89
5.0	74	72	71	70	71	70	69	66	91

Curva limite di luminanza

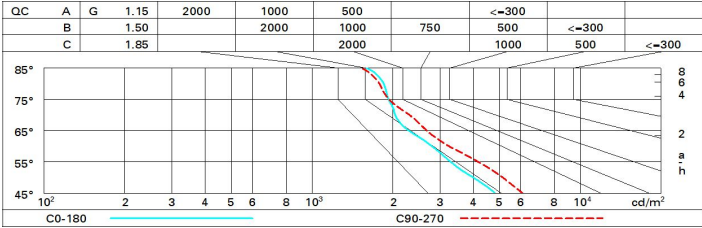


Diagramma UGR

Corrected UGR values (at 8050 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	15.7	16.7	16.0	16.9	17.2	16.8	17.8	17.1	18.0	18.3	18.3
	3H	16.4	17.3	16.8	17.6	17.9	17.0	17.9	17.3	18.2	18.5	18.5
	4H	16.8	17.6	17.1	17.9	18.2	17.0	17.9	17.4	18.2	18.5	18.5
	6H	17.0	17.8	17.4	18.1	18.5	17.0	17.8	17.4	18.1	18.4	18.4
	8H	17.2	17.9	17.5	18.2	18.6	17.0	17.7	17.4	18.1	18.4	18.4
	12H	17.2	17.9	17.6	18.3	18.6	17.0	17.7	17.3	18.0	18.4	18.4
4H	2H	16.1	16.9	16.5	17.2	17.5	17.7	18.5	18.0	18.8	19.1	19.1
	3H	17.0	17.7	17.4	18.0	18.4	18.0	18.7	18.4	19.1	19.4	19.4
	4H	17.4	18.0	17.8	18.4	18.8	18.2	18.8	18.6	19.2	19.5	19.5
	6H	17.8	18.4	18.3	18.8	19.2	18.2	18.8	18.7	19.2	19.6	19.6
	8H	18.0	18.5	18.4	18.9	19.3	18.3	18.8	18.7	19.2	19.6	19.6
	12H	18.1	18.5	18.5	19.0	19.4	18.3	18.7	18.7	19.1	19.6	19.6
8H	4H	17.6	18.1	18.0	18.5	18.9	18.6	19.1	19.0	19.5	19.9	19.9
	6H	18.1	18.5	18.6	19.0	19.5	18.8	19.2	19.2	19.6	20.1	20.1
	8H	18.3	18.7	18.8	19.2	19.7	18.8	19.2	19.3	19.7	20.2	20.2
	12H	18.5	18.8	19.0	19.3	19.8	18.9	19.2	19.4	19.7	20.2	20.2
12H	4H	17.6	18.0	18.0	18.5	18.9	18.6	19.1	19.1	19.5	20.0	20.0
	6H	18.2	18.5	18.6	19.0	19.5	18.9	19.2	19.4	19.7	20.2	20.2
	8H	18.4	18.7	18.9	19.2	19.7	19.0	19.3	19.5	19.8	20.3	20.3
Variations with the observer position at spacing:												
S =		1.0H	0.4 / -0.5		0.3 / -0.4							
		1.5H	0.5 / -1.0		0.7 / -1.2							
		2.0H	1.1 / -1.4		1.6 / -1.6							