

Last information update: November 2024

Product configuration: Q432+Q456.12

Q432: Minimal initial moduleUp/Down Office / Working UGR < 19L 1208

Q456.12: Plate - Up Down Office / Working UGR < 19 - ON-OFF - Neutral LED - L 1196 - 24.4W 2713.5lm - 4000K - Aluminium



Product code

Q432: Minimal initial moduleUp/Down Office / Working UGR < 19L 1208

Technical description

Initial profile in extruded aluminium - Minimal (frameless) version for flush with ceiling mounting and up + down emission; micro-prismatic lower screen for controlled luminance emission UGR < 19 - 3000 cd/m² (working lighting); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

Colour

White (01)* | Aluminium (12)*

Weight (Kg)

3.1

* Colours on request

Mounting

wall surface|ceiling pendant

Wiring

Set up to house the LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



Product code

Q456.12: Plate - Up Down Office / Working UGR < 19 - ON-OFF - Neutral LED - L 1196 - 24.4W 2713.5lm - 4000K - Aluminium

Attention! Code no longer in production

Technical description

LED module set up for housing in initial or intermediate system profiles with screen for controlled luminance - up + down emission. Electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Neutral LED.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00) | White (01)

Weight (Kg)

1.4

Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	2714	Colour temperature [K]:	4000
W system:	24.4	MacAdam Step:	3
lm source:	4050	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	21	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	111.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	861	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	67	Number of optical assemblies:	1
CRI (minimum):	80		


Polar

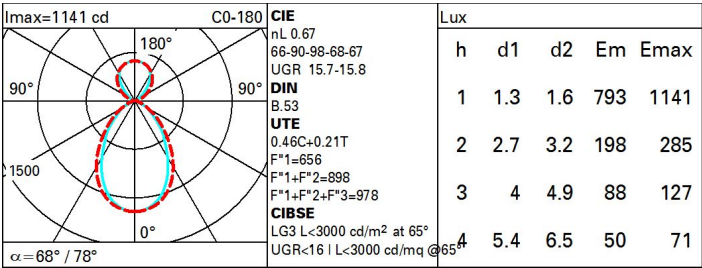

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	43	38	34	31	35	31	29	24	53
1.0	47	42	38	35	39	35	33	27	60
1.5	53	48	45	42	44	42	39	32	71
2.0	56	52	50	47	48	46	42	36	78
2.5	58	55	53	51	50	48	45	38	82
3.0	59	57	55	53	52	50	46	39	86
4.0	61	59	57	56	54	52	48	41	89
5.0	62	60	59	57	55	54	49	42	91

Luminance curve limit

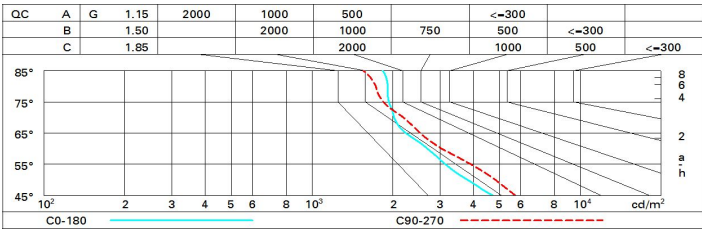

UGR diagram

Corrected UGR values (at 4050 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	13.5	14.2	14.2	14.9	15.8	14.5	15.2	15.3	16.0	16.8	16.8
	3H	14.2	14.8	14.9	15.6	16.5	14.7	15.3	15.4	16.1	16.9	16.9
	4H	14.5	15.1	15.3	15.9	16.8	14.7	15.3	15.5	16.0	16.9	16.9
	6H	14.8	15.4	15.6	16.1	17.1	14.6	15.2	15.4	15.9	16.9	16.9
	8H	14.9	15.4	15.7	16.2	17.2	14.6	15.1	15.4	15.9	16.8	16.8
	12H	15.0	15.5	15.8	16.3	17.2	14.6	15.0	15.3	15.8	16.8	16.8
4H	2H	13.8	14.4	14.6	15.2	16.1	15.3	15.9	16.1	16.7	17.6	17.6
	3H	14.7	15.2	15.5	15.9	16.9	15.7	16.1	16.5	16.9	17.9	17.9
	4H	15.1	15.5	15.9	16.3	17.3	15.7	16.2	16.6	17.0	18.0	18.0
	6H	15.5	15.9	16.4	16.7	17.7	15.8	16.2	16.6	17.0	18.0	18.0
	8H	15.7	16.0	16.5	16.9	17.9	15.8	16.2	16.7	17.0	18.0	18.0
	12H	15.8	16.1	16.7	17.0	18.0	15.8	16.1	16.6	16.9	18.0	18.0
8H	4H	15.2	15.6	16.1	16.4	17.4	16.1	16.5	17.0	17.3	18.3	18.3
	6H	15.8	16.1	16.6	16.9	18.0	16.3	16.6	17.2	17.4	18.5	18.5
	8H	16.0	16.3	16.9	17.1	18.2	16.4	16.6	17.3	17.5	18.6	18.6
	12H	16.2	16.4	17.1	17.3	18.4	16.4	16.6	17.3	17.5	18.6	18.6
12H	4H	15.2	15.5	16.0	16.4	17.4	16.2	16.5	17.0	17.3	18.4	18.4
	6H	15.8	16.0	16.7	16.9	18.0	16.4	16.6	17.3	17.5	18.6	18.6
	8H	16.1	16.3	17.0	17.2	18.3	16.5	16.7	17.4	17.6	18.7	18.7
Variations with the observer position at spacing:												
S =		1.0H	0.3 / -0.5		0.3 / -0.4							
		1.5H	0.5 / -0.9		0.6 / -1.1							
		2.0H	1.2 / -1.3		1.5 / -1.5							