


Last information update: December 2024

**Product configuration: Q437**

Q437: Frame Angular Module - Down Office / Working UGR &lt; 19 - Neutral LED - DALI

**Product code**

Q437: Frame Angular Module - Down Office / Working UGR &lt; 19 - Neutral LED - DALI

**Technical description**

Angular element for Frame version profiles with contact frame; including a Neutral LED module. Microprismatic screen for controlled luminance emission UGR < 19 - 3000 cd/m<sup>2</sup> (working lighting); screen set up for connecting several lengths by overlapping. Built-in DALI dimmable control gear. Pass-through wiring for continuous lines:

**Installation**

Recessed using the brackets on the profile.

**Colour**

White (01) | Aluminium (12)\*

**Weight (Kg)**

5.1

\* Colours on request

**Mounting**

ceiling recessed

**Wiring**

The angular profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks to simplify connections between the luminaires. LED module complete with integrated dimmable DALI control gear.

**Notes**

Take care when configuring the system; to complete a continuous line with an angular profile correctly, two initial modules are required, one for each side of the corner.

TPb rated. TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1944	Colour temperature [K]:	4000
W system:	15.6	MacAdam Step:	3
lm source:	1350	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	6.8	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	124.6	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	72	Number of optical assemblies:	2
CRI (minimum):	80	Control:	DALI-2

**Polar**


Imax=607 cd		C0-180		CIE		Lux	
90°		180°		nL 0.72		h	d1 d2 Em Emax
600		0°		66-90-98-100-72		1	1.3 1.6 422 607
α=68° / 78°				UGR 17.7-18.0		2	2.7 3.2 105 152
				DIN A.51		3	4 4.9 47 67
				UTE 0.72C+0.00T		4	5.4 6.5 26 38
				F*1=662			
				F*1+F*2=902			
				F*1+F*2+F*3=980			
				CIBSE LG3 L<3000 cd/m² at 65°			
				UGR<19   L<3000 cd/mq @65°			



# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	47	43	40	47	43	42	38	53
1.0	58	52	48	45	51	48	47	43	60
1.5	64	60	56	53	59	56	55	51	71
2.0	68	64	61	59	63	61	60	56	78
2.5	70	67	65	63	66	64	63	60	83
3.0	71	69	67	65	68	66	65	62	86
4.0	73	71	70	68	70	68	67	64	89
5.0	74	72	71	70	71	70	69	66	91

# Luminance curve limit

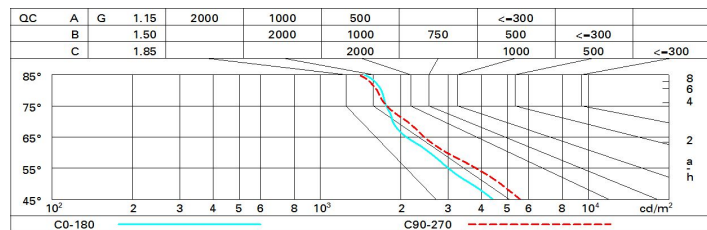

# UGR diagram

Corrected UGR values (at 1350 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	15.4	16.4	15.7	16.6	16.9	16.5	17.5	16.8	17.7	18.0
	3H	16.1	17.0	16.4	17.3	17.6	16.7	17.6	17.0	17.8	18.1
	4H	16.4	17.3	16.8	17.6	17.9	16.7	17.5	17.1	17.8	18.2
	6H	16.7	17.5	17.1	17.8	18.2	16.7	17.5	17.1	17.8	18.1
	8H	16.8	17.6	17.2	17.9	18.3	16.7	17.4	17.1	17.7	18.1
12H	16.9	17.6	17.3	17.9	18.3	16.7	17.3	17.0	17.7	18.1	
4H	2H	15.8	16.6	16.2	16.9	17.2	17.4	18.2	17.7	18.5	18.8
	3H	16.7	17.4	17.1	17.7	18.1	17.7	18.4	18.1	18.8	19.1
	4H	17.1	17.7	17.5	18.1	18.5	17.8	18.5	18.3	18.8	19.2
	6H	17.5	18.1	18.0	18.5	18.9	17.9	18.5	18.4	18.9	19.3
	8H	17.7	18.2	18.1	18.6	19.0	18.0	18.5	18.4	18.9	19.3
12H	17.8	18.2	18.2	18.7	19.1	17.9	18.4	18.4	18.8	19.3	
8H	4H	17.3	17.8	17.7	18.2	18.6	18.2	18.7	18.7	19.2	19.6
	6H	17.8	18.2	18.3	18.7	19.1	18.5	18.9	18.9	19.3	19.8
	8H	18.0	18.4	18.5	18.9	19.4	18.5	18.9	19.0	19.4	19.9
	12H	18.2	18.5	18.7	19.0	19.5	18.6	18.9	19.1	19.4	19.9
12H	4H	17.3	17.7	17.7	18.2	18.6	18.3	18.8	18.8	19.2	19.7
	6H	17.8	18.2	18.3	18.7	19.2	18.6	18.9	19.0	19.4	19.9
	8H	18.1	18.4	18.6	18.9	19.4	18.7	19.0	19.2	19.5	20.0
Variations with the observer position at spacing:											
S =	1.0H	0.4 / -0.5					0.3 / -0.4				
	1.5H	0.5 / -1.0					0.7 / -1.2				
	2.0H	1.1 / -1.4					1.6 / -1.6				