


Last information update: March 2025

**Product configuration: Q706**

Q706: Spotlight with base - Warm White Led - Class III - Very Wide Flood optic

**Product code**

Q706: Spotlight with base - Warm White Led - Class III - Very Wide Flood optic

**Technical description**

Spotlight designed to use LED lamps and a Very Wide Flood optic. The optical assembly and base is made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. 5 mm thick tempered sodium-calcium closing glass. Double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks for rotation on both the vertical axis and horizontal plane. Complete with a monochrome LED circuit and an Opti Beam Reflector optic system. The product is supplied with a PG13.5 cable gland and black rubber outlet cable complete with anti-transpiration device. Black rubber outlet cable complete with anti-transpiration device. Electronic ballast to be ordered separately. Option of using optic accessories assembled via an accessory holder frame. All external screws used are made of A2 stainless steel.

**Installation**

Floor, wall, ceiling or ground-installed via a stake.

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

1.3

**Mounting**

wall surface|ground spike

**Wiring**

The product is supplied with a black rubber outlet cable complete with anti-transpiration device L=1000mm.

Complies with EN60598-1 and pertinent regulations


**Technical data**

|  |       |   |                                |
|--|-------|---|--------------------------------|
| Im system:   | 1445  | MacAdam Step:   | 2                              |
| W system:  | 12    | Life Time LED 1:                                      | 100,000h - L90 - B10 (Ta 25°C) |
| Im source:   | 1720  | Life Time LED 2:                                      | 100,000h - L90 - B10 (Ta 40°C) |
| W source:  | 12    | Lamp code:  | LED                            |
| Luminous efficiency (Im/W, real value):            | 120.4 | Number of lamps for optical assembly:                 | 1                              |
| Im in emergency mode:                              | -     | ZVEI Code:  | LED                            |
| Total light flux at or above an angle of 90° [Lm]: | 0     | Number of optical assemblies:                         | 1                              |
| Light Output Ratio (L.O.R.) [%]:                   | 84    | Intervallo temperatura ambiente:                      | from -30°C to 50°C.            |
| Beam angle [°]:                                    | 78°   | Lifetime of product at ambient operating temperature: | ≥ 50,000h Ta=40°C              |
| CRI (minimum):                                     | 80    | LED current [mA]:                                     | 350                            |
| Colour temperature [K]:                            | 2700  |   |                                |

**Polar**

| Imax=1072 cd        |      | Lux |   |     |         |
|---------------------|------|-----|---|-----|---------|
| 90°                 | 180° | 90° | h | d   | Em Emax |
|                     |      |     | 2 | 3.2 | 191 268 |
|                     |      |     | 4 | 6.5 | 48 67   |
|                     |      |     | 6 | 9.7 | 21 30   |
|                     |      |     | 8 | 13  | 12 17   |
| $\alpha = 78^\circ$ |      |     |   |     |         |

### Isolux

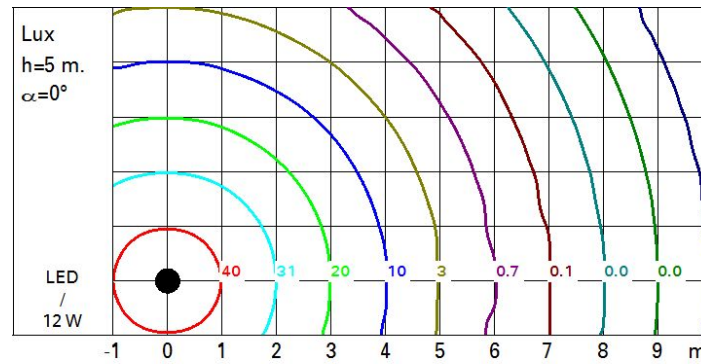

### UGR diagram

| Corrected UGR values (at 1720 lm bare lamp luminous flux) |     |                  |             |      |      |      |                |         |      |      |      |
|---|-----|------------------|-------------|------|------|------|----------------|---------|------|------|------|
| Riflect.:   |     | viewed crosswise |             |      |      |      | viewed endwise |         |      |      |      |
| ceiling/cav   |     | 0.70             | 0.70        | 0.50 | 0.50 | 0.30 | 0.70           | 0.70    | 0.50 | 0.50 | 0.30 |
| walls   |     | 0.50             | 0.30        | 0.50 | 0.30 | 0.30 | 0.50           | 0.30    | 0.50 | 0.30 | 0.30 |
| work pl.  |     | 0.20             | 0.20        | 0.20 | 0.20 | 0.20 | 0.20           | 0.20    | 0.20 | 0.20 | 0.20 |
| Room dim  |     | viewed crosswise |             |      |      |      | viewed endwise |         |      |      |      |
| x   | y   |                  |             |      |      |      |                |         |      |      |      |
| 2H  | 2H  | 25.3             | 26.1        | 25.6 | 26.3 | 26.6 | 25.3           | 26.1    | 25.6 | 26.3 | 26.6 |
|   | 3H  | 25.2             | 25.9        | 25.5 | 26.1 | 26.4 | 25.2           | 25.9    | 25.5 | 26.1 | 26.4 |
|   | 4H  | 25.1             | 25.7        | 25.5 | 26.0 | 26.3 | 25.1           | 25.7    | 25.5 | 26.0 | 26.3 |
|   | 6H  | 25.0             | 25.6        | 25.4 | 25.9 | 26.3 | 25.1           | 25.6    | 25.4 | 25.9 | 26.3 |
|   | 8H  | 25.0             | 25.6        | 25.4 | 25.9 | 26.2 | 25.0           | 25.6    | 25.4 | 25.9 | 26.2 |
|   | 12H | 25.0             | 25.5        | 25.4 | 25.8 | 26.2 | 25.0           | 25.5    | 25.4 | 25.8 | 26.2 |
| 4H  | 2H  | 25.1             | 25.7        | 25.5 | 26.0 | 26.3 | 25.1           | 25.7    | 25.5 | 26.0 | 26.3 |
|   | 3H  | 25.0             | 25.5        | 25.4 | 25.8 | 26.2 | 25.0           | 25.5    | 25.4 | 25.8 | 26.2 |
|   | 4H  | 24.9             | 25.3        | 25.3 | 25.7 | 26.1 | 24.9           | 25.3    | 25.3 | 25.7 | 26.1 |
|   | 6H  | 24.8             | 25.2        | 25.2 | 25.6 | 26.0 | 24.8           | 25.2    | 25.2 | 25.6 | 26.0 |
|   | 8H  | 24.8             | 25.1        | 25.2 | 25.5 | 26.0 | 24.8           | 25.1    | 25.2 | 25.5 | 26.0 |
|   | 12H | 24.7             | 25.0        | 25.2 | 25.5 | 25.9 | 24.7           | 25.0    | 25.2 | 25.5 | 25.9 |
| 8H  | 4H  | 24.8             | 25.1        | 25.2 | 25.5 | 26.0 | 24.8           | 25.1    | 25.2 | 25.5 | 26.0 |
|   | 6H  | 24.7             | 25.0        | 25.1 | 25.4 | 25.9 | 24.7           | 25.0    | 25.1 | 25.4 | 25.9 |
|   | 8H  | 24.6             | 24.9        | 25.1 | 25.3 | 25.8 | 24.6           | 24.9    | 25.1 | 25.3 | 25.8 |
|   | 12H | 24.6             | 24.8        | 25.1 | 25.3 | 25.8 | 24.6           | 24.8    | 25.1 | 25.3 | 25.8 |
| 12H   | 4H  | 24.7             | 25.0        | 25.2 | 25.5 | 25.9 | 24.7           | 25.0    | 25.2 | 25.5 | 25.9 |
|   | 6H  | 24.6             | 24.9        | 25.1 | 25.3 | 25.8 | 24.6           | 24.9    | 25.1 | 25.3 | 25.8 |
|   | 8H  | 24.6             | 24.8        | 25.1 | 25.3 | 25.8 | 24.6           | 24.8    | 25.1 | 25.3 | 25.8 |
| Variations with the observer position at spacing:         |     |                  |             |      |      |      |                |         |      |      |      |
| S =   |     | 1.0H             | 3.2 / -10.6 |      |      |      | 3.2            | / -10.6 |      |      |      |
|   |     | 1.5H             | 5.5 / -23.3 |      |      |      | 5.5            | / -23.3 |      |      |      |
|   |     | 2.0H             | 7.5 / -25.3 |      |      |      | 7.5            | / -25.3 |      |      |      |