


## iGuzzini

**Product configuration: Q866**

Q866: LB XS pendant HC - Flood beam - h 600 - integrated driver

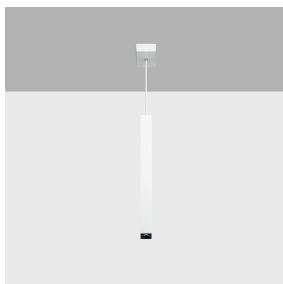

Q866: LB XS pendant HC - Flood beam - h 600 - integrated driver

Miniaturised pendant luminaire with LED lamp, ideal for zenithal accent lighting. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of visual comfort. Metallised thermoplastic high definition Opti-Beam reflector. Extruded aluminium main body and technical dissipation unit. Thermoplastic ceiling rose with shaped steel fixing plate. PVC power/pendant cable in the same colour as the external finish. The cable connection on the pendant body is fitted with a manual adjustment system that facilitates alignment. ON-OFF driver integrated in luminaire body.

Ceiling rose with surface fixing plate (screws and screw anchors not included)

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)\* | Black/gold (44)\* | White / burnished chrome (E7)\* | Black/burnished chrome (F1)\*

\* Colours on request

## Weight (Kg)

0.45

ceiling pendant

Connection terminal included on ceiling plate - the pendant cable can be adjusted on the pendant body

Complies with EN60598-1 and pertinent regulations




Im system:	192	MacAdam Step:	2
W system:	3.8	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Im source:	240	Lamp code:	LED
W source:	2	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	50.5	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	80	Inrush current:	27 A / 250 µs
Beam angle [°]:	42°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 17 luminaires B16A: 27 luminaires C10A: 28 luminaires C16A: 45 luminaires
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	4000		

<p><math>\text{Imax}=404 \text{ cd}</math></p> <p>CIE nL 0.80 100-100-100-100-80 UGR &lt;10-&lt;10</p> <p>DIN A.61</p> <p>UTE 0.80A+0.00T <math>F^*1=997</math> <math>F^*1+F^*2=999</math> <math>F^*1+F^*2+F^*3=1000</math></p> <p>CIBSE LG3 L&lt;3000 cd/m<sup>2</sup> at 65° UGR&lt;10   L&lt;3000 cd/mq @65°</p> <p><math>\alpha = 42^\circ</math></p>	Lux			
	h	d	Em	Emax
	1	0.8	321	402
	2	1.5	80	100
	3	2.3	36	45
	4	3	20	25

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	82	80	78	77	79	77	76	74	93
2.5	83	82	81	80	81	80	79	77	96
3.0	84	83	82	82	82	81	80	78	98
4.0	85	84	84	83	83	83	81	79	99
5.0	86	85	85	84	84	83	82	80	100

# Luminance curve limit

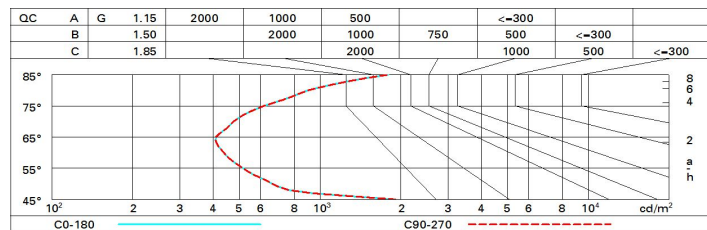

# UGR diagram

Corrected UGR values (at 240 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	9.0	9.0	9.3	9.8	10.0	9.0	9.0	9.3	9.8	10.0
	3H	8.9	9.4	9.2	9.7	9.9	8.9	9.4	9.2	9.7	9.9
	4H	8.8	9.3	9.1	9.6	9.9	8.8	9.3	9.1	9.6	9.9
	6H	8.7	9.2	9.1	9.5	9.8	8.7	9.2	9.1	9.5	9.8
	8H	8.7	9.2	9.1	9.5	9.8	8.7	9.1	9.0	9.4	9.8
	12H	8.7	9.1	9.1	9.5	9.8	8.6	9.1	9.0	9.4	9.7
4H	2H	8.8	9.3	9.1	9.6	9.9	8.8	9.3	9.1	9.6	9.9
	3H	8.7	9.1	9.0	9.4	9.8	8.7	9.1	9.0	9.4	9.8
	4H	8.6	8.9	9.0	9.3	9.7	8.6	8.9	9.0	9.3	9.7
	6H	8.5	8.8	8.9	9.2	9.7	8.5	8.8	8.9	9.2	9.6
	8H	8.5	8.8	8.9	9.2	9.6	8.5	8.7	8.9	9.2	9.6
	12H	8.5	8.8	9.0	9.2	9.7	8.4	8.7	8.9	9.1	9.6
8H	4H	8.5	8.7	8.9	9.2	9.6	8.5	8.8	8.9	9.2	9.6
	6H	8.4	8.7	8.9	9.1	9.6	8.4	8.7	8.9	9.1	9.6
	8H	8.4	8.6	8.9	9.1	9.6	8.4	8.6	8.9	9.1	9.6
	12H	8.4	8.6	8.9	9.1	9.6	8.4	8.6	8.9	9.0	9.6
12H	4H	8.4	8.7	8.9	9.1	9.6	8.5	8.8	9.0	9.2	9.7
	6H	8.4	8.6	8.9	9.0	9.5	8.5	8.7	8.9	9.1	9.6
	8H	8.4	8.6	8.9	9.0	9.6	8.4	8.6	8.9	9.1	9.6
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -8.9					6.7 / -8.9				
	1.5H	9.5 / -9.1					9.5 / -9.1				
	2.0H	11.5 / -9.3					11.5 / -9.3				