

Laser Blade XS



iGuzzini

iGuzzini

Last information update: February 2025

Product configuration: Q946
Q946: Recessed Frame luminaire - 5 cells - General Lighting Pro

Q946: Recessed Frame luminaire - 5 cells - General Lighting Pro



Q946: Recessed Frame luminaire - 5 cells - General Lighting Pro **Attention! Code no longer in production**

Q946: Recessed Frame luminaire - 5 cells - General Lighting Pro **Attention! Code no longer in production**

Rectangular recessed miniaturised luminaire with 5 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Despite the ultracompact size of the product, the combination of a total white finish and the patented technology of the optic system guarantees an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with electronic power supply connected to the luminaire.

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 96.

Weight (Kg)
0.35

mounting
wall recessed ceiling recessed

On power supply: terminal block with screw connection included.

Complies with EN60598-1 and pertinent regulations



Im system:	614	CRI (minimum):	90
W system:	12.4	Colour temperature [K]:	2700
Im source:	890	MacAdam Step:	2
W source:	9.9	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	49.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	69	Number of optical assemblies:	1

The figure shows a light distribution diagram (left) and a table of photometric data (right).

Light Distribution Diagram:

- Maximum illuminance: $I_{\max} = 738 \text{ cd}$
- Beam angle: $\alpha = 54^\circ$
- Diagram shows a beam of light with a width of 750 mm at the base.
- Angles marked: 90° , 180° , 90° , and 0° .


Photometric Data:

CIE		Lux			
nL 0.69					
88-98-100-100-69					
UGR 21.8-21.7					
DIN					
A.61					
UTE					
0.69A+0.00T					
F*1=877					
F*1+F*2=981					
F*1+F*2+F*3=997					
	h	d	Em	Emax	
1	1	1	547	738	
2	2	2	137	184	
3	3.1	3.1	61	82	
4	4.1	4.1	34	46	

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	58	54	51	49	54	51	51	48	69
1.0	62	58	55	53	57	55	54	52	75
1.5	66	63	61	59	62	60	60	57	83
2.0	69	66	65	63	65	64	63	61	88
2.5	70	68	67	66	67	66	65	63	92
3.0	71	70	69	68	69	68	67	65	94
4.0	72	71	70	70	70	69	68	66	96
5.0	73	72	71	71	71	70	69	67	97

Luminance curve limit

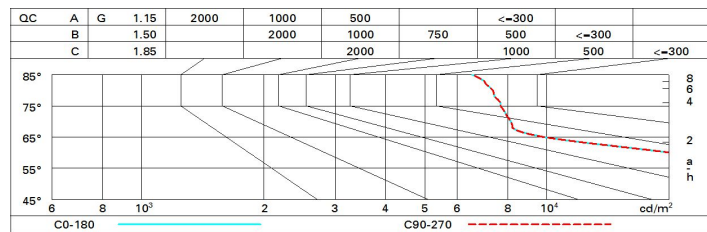

UGR diagram

Corrected UGR values (at 890 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	21.9	22.5	22.1	22.7	23.0	21.9	22.5	22.1	22.7	23.0
	3H	21.8	22.4	22.2	22.7	23.0	21.9	22.4	22.2	22.7	23.0
	4H	21.8	22.4	22.2	22.6	23.0	21.8	22.4	22.2	22.6	22.9
	6H	21.8	22.3	22.2	22.6	22.9	21.7	22.2	22.1	22.6	22.9
	8H	21.8	22.3	22.2	22.6	22.9	21.7	22.2	22.1	22.5	22.9
	12H	21.8	22.2	22.1	22.6	22.9	21.7	22.1	22.1	22.5	22.8
4H	2H	21.8	22.4	22.2	22.6	22.9	21.8	22.4	22.2	22.6	23.0
	3H	21.8	22.3	22.2	22.6	23.0	21.9	22.3	22.2	22.7	23.0
	4H	21.8	22.2	22.2	22.6	23.0	21.8	22.2	22.2	22.6	23.0
	6H	21.8	22.2	22.3	22.6	23.0	21.8	22.1	22.2	22.5	22.9
	8H	21.8	22.1	22.3	22.6	23.0	21.7	22.1	22.2	22.5	22.9
	12H	21.8	22.1	22.3	22.5	23.0	21.7	22.0	22.2	22.4	22.9
8H	4H	21.7	22.1	22.2	22.5	22.9	21.8	22.1	22.3	22.6	23.0
	6H	21.8	22.0	22.3	22.5	23.0	21.8	22.1	22.3	22.5	23.0
	8H	21.8	22.0	22.3	22.5	23.0	21.8	22.0	22.3	22.5	23.0
	12H	21.8	22.0	22.3	22.5	23.0	21.8	22.0	22.3	22.5	23.0
12H	4H	21.7	22.0	22.2	22.4	22.9	21.8	22.1	22.3	22.5	23.0
	6H	21.7	22.0	22.2	22.4	22.9	21.8	22.0	22.3	22.5	23.0
	8H	21.8	22.0	22.3	22.5	23.0	21.8	22.0	22.3	22.5	23.0
Variations with the observer position at spacing:											
S =		1.0H					2.4 / -2.2				
		1.5H					4.5 / -4.7				
		2.0H					6.3 / -6.0				