


Last information update: March 2025

Product configuration: QA02.43

QA02.43: Ø59 Tech - DALI - Medium Beam - Black / Black

**Product code**

QA02.43: Ø59 Tech - DALI - Medium Beam - Black / Black

Technical description

Cylindrical lighting body for ceiling or pendant-mounted applications. Fixed optic lighting system with a high definition reflector made of metallised thermoplastic. The LEDs are set back to minimize glare and guarantee a high level of visual comfort. Structural cylinder made of painted extruded aluminium with an inner ring made of thermoplastic available in different painted or metallised finishes. Glass cover Using specific accessory kits, ceiling or pendant-mounted installations can be made with minimum intervention and simplified by a practical bayonet coupling system. DALI dimmable driver integrated in the luminaire.

Installation

Ceiling or pendant-mounted - use the appropriate assembly kits available with a separate item code.

Colour

Black / Black (43)

Weight (Kg)

0.47

Mounting

ceiling surface|ceiling pendant

Wiring

The lighting body is fitted with an internal terminal board for connectinf it to the power line or pendant cable.

Notes

A wide range of decorative accessories and diffusers is available.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	842	CRI (minimum):	90
W system:	11	Colour temperature [K]:	2700
Im source:	1080	MacAdam Step:	2
W source:	11	Lamp code:	LED
Luminous efficiency (Im/W, real value):	76.6	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	78	Control:	DALI-2
Beam angle [°]:	24°		


Polar

	Lux			
	h	d	Em	Emax
	2	0.8	931	1130
	4	1.7	233	283
	6	2.5	103	126
I _{max} =4521 cd α = 24°	8	3.4	58	71

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	64	62	66	64	64	61	78
1.0	74	70	68	66	70	67	67	65	83
1.5	77	75	73	71	74	72	71	69	89
2.0	80	78	76	75	77	75	75	73	93
2.5	81	80	79	78	79	78	77	75	96
3.0	82	81	80	80	80	79	78	76	98
4.0	83	82	82	81	81	81	79	78	99
5.0	83	83	83	82	82	81	80	78	100

Luminance curve limit

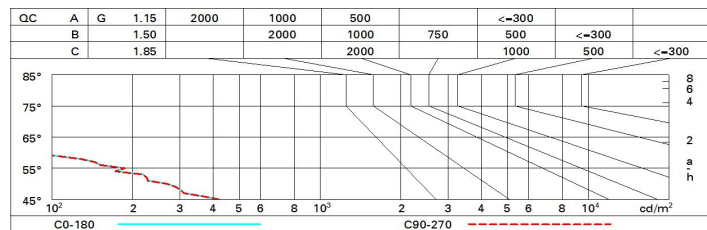

UGR diagram

Corrected UGR values (at 1080 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	-9.3	-7.1	-8.9	-6.8	-6.5	-9.3	-7.1	-8.9	-6.8	-6.5
	3H	-9.4	-7.8	-9.1	-7.5	-7.2	-9.4	-7.8	-9.0	-7.5	-7.1
	4H	-9.5	-8.2	-9.1	-7.9	-7.5	-9.5	-8.2	-9.1	-7.9	-7.5
	6H	-9.5	-8.6	-9.1	-8.3	-7.9	-9.5	-8.6	-9.1	-8.2	-7.9
	8H	-9.6	-8.6	-9.2	-8.3	-7.9	-9.5	-8.6	-9.2	-8.3	-7.9
	12H	-9.6	-8.7	-9.2	-8.3	-7.9	-9.6	-8.7	-9.2	-8.3	-7.9
4H	2H	-9.5	-8.2	-9.1	-7.9	-7.5	-9.5	-8.2	-9.1	-7.9	-7.5
	3H	-9.6	-8.7	-9.2	-8.3	-7.9	-9.6	-8.7	-9.2	-8.3	-7.9
	4H	-9.7	-8.8	-9.3	-8.4	-8.0	-9.7	-8.8	-9.3	-8.4	-8.0
	6H	-10.1	-8.4	-9.6	-7.9	-7.5	-10.1	-8.4	-9.6	-7.9	-7.5
	8H	-10.3	-8.3	-9.8	-7.8	-7.3	-10.3	-8.3	-9.8	-7.8	-7.3
	12H	-10.4	-8.4	-9.9	-7.9	-7.4	-10.4	-8.4	-9.9	-7.9	-7.4
8H	4H	-10.3	-8.3	-9.8	-7.8	-7.3	-10.3	-8.3	-9.8	-7.8	-7.3
	6H	-10.4	-8.6	-9.9	-8.1	-7.5	-10.4	-8.6	-9.9	-8.1	-7.5
	8H	-10.4	-8.8	-9.9	-8.3	-7.8	-10.4	-8.8	-9.9	-8.3	-7.8
	12H	-10.2	-9.2	-9.7	-8.7	-8.2	-10.2	-9.2	-9.7	-8.7	-8.2
12H	4H	-10.4	-8.4	-9.9	-7.9	-7.4	-10.4	-8.4	-9.9	-7.9	-7.4
	6H	-10.4	-8.8	-9.9	-8.3	-7.8	-10.4	-8.8	-9.9	-8.3	-7.8
	8H	-10.2	-9.2	-9.7	-8.7	-8.2	-10.2	-9.2	-9.7	-8.7	-8.2
Variations with the observer position at spacing:											
S =	1.0H	5.6 / -9.7					5.6 / -9.7				
	1.5H	8.4 / -25.6					8.4 / -25.6				
	2.0H	10.4 / -29.0					10.4 / -29.0				