


**Product configuration: QG52**

QG52: small body - Neutral White - DALI - flood optic



## Product code

QG52: small body - Neutral White - DALI - flood optic

## Technical description

Adjustable spotlight with adapter for installation on mains electrified track for high output LED lamp with monochrome emission in a Neutral White (4000K) tone. DALI ballast integrated in the product. Luminaire made of die-cast aluminium and thermoplastic material, allows 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. The luminaire has mechanical aiming locks for both movements, operated using the same tool on two screws, one at the side of the rod and one on the adapter for the track. Passive heat dissipation. Spotlight can hold up to two flat accessories at the same time. Another external component can also be applied, selected from directional flaps and an anti-glare screen. All external accessories rotate 360° about the spotlight longitudinal axis.

## Installation

On an electrified track with a special base

**Colour**

White (01) | Black (04)

## Weight (Kg)

1.28

## Mounting

three circuit track

## Wiring


DALI components housed in the luminaire

**Sistemi di controllo compatibili:**


Quick BLE [↗](#)

Quick DALI - Touch display 7" [↗](#)

Quick DALI LMS Quick [↗](#)

Quick DRYTIME Quick  
Master Pro Evo KNX 


Complies with EN60598-1 and pertinent regulations

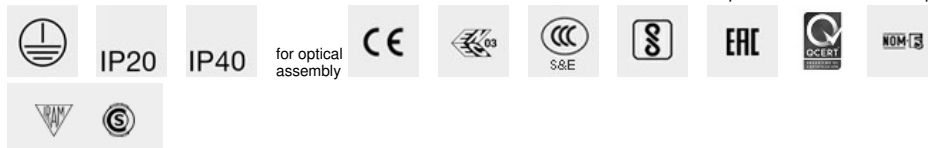


## Technical data

Im system:	1922	CRI (minimum):	97
W system:	28.5	Colour temperature [K]:	4000
Im source:	2700	MacAdam Step:	2
W source:	26	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	67.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	71	Number of optical assemblies:	1
Beam angle [°]:	38°	Control:	DALI-2

## Polar

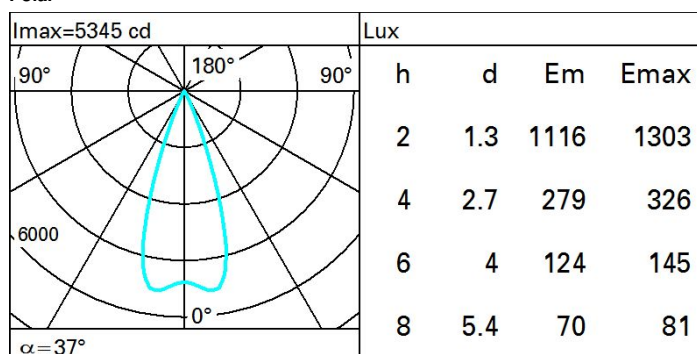

### Isolux

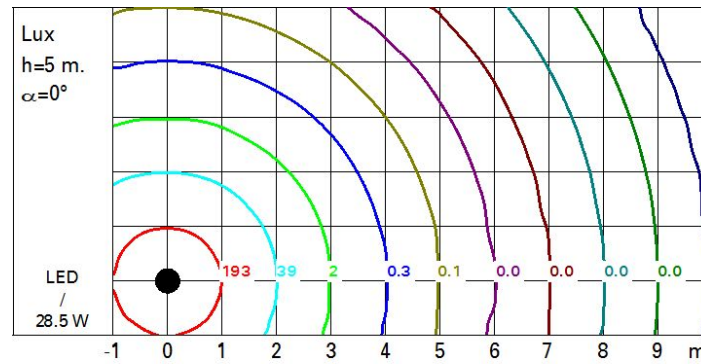

### UGR diagram

Corrected UGR values (at 2700 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	1.2	1.7	1.5	1.9	2.1	1.2	1.7	1.5	1.9	2.1
	3H	1.1	1.5	1.4	1.8	2.1	1.1	1.6	1.4	1.8	2.1
	4H	1.0	1.4	1.3	1.7	2.0	1.0	1.5	1.4	1.7	2.0
	6H	0.9	1.3	1.3	1.6	1.9	0.9	1.3	1.3	1.7	2.0
	8H	0.9	1.3	1.2	1.6	1.9	0.9	1.3	1.3	1.6	2.0
	12H	0.8	1.2	1.2	1.5	1.9	0.9	1.2	1.2	1.6	1.9
4H	2H	1.0	1.5	1.4	1.7	2.0	1.0	1.4	1.3	1.7	2.0
	3H	0.9	1.3	1.3	1.6	1.9	0.9	1.2	1.3	1.6	1.9
	4H	0.8	1.1	1.2	1.5	1.9	0.8	1.1	1.2	1.5	1.9
	6H	0.7	1.0	1.1	1.4	1.8	0.7	1.0	1.1	1.4	1.8
	8H	0.7	0.9	1.1	1.3	1.8	0.7	0.9	1.1	1.3	1.8
	12H	0.6	0.8	1.1	1.3	1.7	0.6	0.8	1.1	1.3	1.7
8H	4H	0.7	0.9	1.1	1.3	1.8	0.7	0.9	1.1	1.3	1.8
	6H	0.6	0.8	1.0	1.2	1.7	0.6	0.8	1.0	1.2	1.7
	8H	0.5	0.7	1.0	1.2	1.7	0.5	0.7	1.0	1.2	1.7
	12H	0.5	0.6	1.0	1.1	1.6	0.5	0.6	1.0	1.1	1.6
12H	4H	0.6	0.8	1.1	1.3	1.7	0.6	0.8	1.1	1.3	1.7
	6H	0.5	0.7	1.0	1.2	1.7	0.5	0.7	1.0	1.2	1.7
	8H	0.5	0.6	1.0	1.1	1.6	0.5	0.6	1.0	1.1	1.6
Variations with the observer position at spacing:											
S =		1.0H	5.1 / -6.9				5.1 / -6.9				
		1.5H	7.9 / -10.4				7.9 / -10.4				
		2.0H	9.8 / -17.0				9.8 / -17.0				