

Last information update: April 2025

Product configuration: QG65

QG65: Medium body spotlight - warm white - electronic ballast and dimmer - wide flood optic



Product code

QG65: Medium body spotlight - warm white - electronic ballast and dimmer - wide flood optic

Technical description

Adjustable spotlight with adapter for installation on electrified track for 8x1W high output LED lamp with monochrome emission in a warm White (3000K) tone. Dimmable electronic ballast integrated in the product. Luminaire made of die-cast aluminium and thermoplastic material, allows 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. The luminaire has mechanical aiming locks for both movements, operated using the same tool on two screws, one at the side of the rod and one on the adapter for the track. Passive heat dissipation. Spotlight can hold up to two flat accessories at the same time. Another external component can also be applied, selected from directional flaps and an anti-glare screen. All external accessories rotate 360° about the spotlight longitudinal axis.

Installation

On an electrified track

Colour

White (01) | Black (04)

Weight (Kg)

2.1

Mounting

three circuit track

Wiring

Electronic components housed in the luminaire

Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2960	CRI (minimum):	97
W system:	40.2	Colour temperature [K]:	3000
Im source:	3750	MacAdam Step:	2
W source:	36	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	73.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	42°	Control:	Completo di dimmer


Polar

<p>Imax=6484 cd α = 43°</p>	CIE nL 0.79 99-100-100-100-79 UGR <10-10				Lux			
	DIN A.61				h	d	Em	E _{max}
	UTE 0.79A+0.00T F*1=994 F*1+F*2=999 F*1+F*2+F*3=1000				2	1.6	1316	1594
	CIBSE LG3 L<1500 cd/m² at 65° UGR<10 L<1500 cd/mq @65°				4	3.1	329	399
					6	4.7	146	177
					8	6.3	82	100

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	63	67	65	64	62	78
1.0	74	71	69	67	70	68	68	65	83
1.5	78	75	74	72	75	73	72	70	88
2.0	80	79	77	76	78	76	75	73	93
2.5	82	81	79	79	79	78	78	75	96
3.0	83	82	81	80	81	80	79	77	98
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	83	82	81	79	100

Luminance curve limit

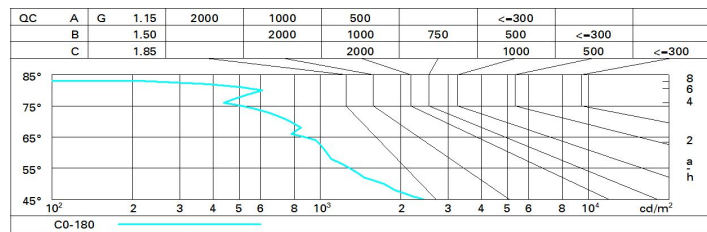

UGR diagram

Corrected UGR values (at 3750 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	4.9	5.5	5.2	5.7	6.0	4.9	5.5	5.2	5.7	6.0
	3H	4.9	5.4	5.2	5.7	6.0	4.9	5.4	5.2	5.6	5.9
	4H	4.9	5.4	5.2	5.7	6.0	4.8	5.3	5.2	5.6	5.9
	6H	4.9	5.3	5.2	5.6	5.9	4.8	5.2	5.1	5.5	5.8
	8H	4.8	5.3	5.2	5.6	5.9	4.7	5.1	5.1	5.5	5.8
	12H	4.8	5.2	5.2	5.5	5.9	4.7	5.1	5.1	5.4	5.8
4H	2H	4.8	5.3	5.2	5.6	5.9	4.9	5.4	5.2	5.7	6.0
	3H	4.8	5.2	5.2	5.6	5.9	4.9	5.3	5.2	5.6	5.9
	4H	4.8	5.2	5.2	5.5	5.9	4.8	5.2	5.2	5.5	5.9
	6H	4.8	5.1	5.2	5.5	5.9	4.7	5.1	5.2	5.5	5.9
	8H	4.8	5.0	5.2	5.5	5.9	4.7	5.0	5.1	5.4	5.8
	12H	4.7	5.0	5.2	5.4	5.9	4.7	4.9	5.1	5.4	5.8
8H	4H	4.7	5.0	5.1	5.4	5.8	4.8	5.0	5.2	5.5	5.9
	6H	4.7	4.9	5.2	5.4	5.9	4.7	4.9	5.2	5.4	5.9
	8H	4.7	4.9	5.2	5.3	5.8	4.7	4.9	5.2	5.3	5.8
	12H	4.6	4.8	5.1	5.3	5.8	4.6	4.8	5.1	5.3	5.8
12H	4H	4.7	4.9	5.1	5.4	5.8	4.7	5.0	5.2	5.4	5.9
	6H	4.7	4.9	5.1	5.3	5.8	4.7	4.9	5.1	5.3	5.8
	8H	4.6	4.8	5.1	5.3	5.8	4.6	4.8	5.1	5.3	5.8
Variations with the observer position at spacing:											
S =	1.0H	5.6 / -5.4					5.6 / -5.4				
	1.5H	8.3 / -6.1					8.3 / -6.1				
	2.0H	10.2 / -6.8					10.2 / -6.8				