


Last information update: April 2025

Product configuration: QG77

QG77: small body spotlight - warm white LEDs - DALI ballast - wall-washer optic

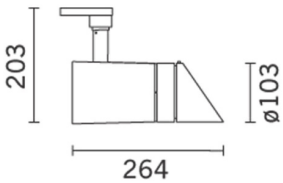

Product code

QG77: small body spotlight - warm white LEDs - DALI ballast - wall-washer optic

Technical description

Adjustable spotlight with adapter for installation on electrified track for 8x1W high output LED lamp with monochrome emission in a Warm White (3000K) tone. Wall-washer optic. DALI ballast integrated in the product. Luminaire made of die-cast aluminium and thermoplastic material, allows 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. The luminaire has mechanical aiming locks for both movements, operated using the same tool on two screws, one at the side of the rod and one on the adapter for the track. Graduated scale for aiming and rotation around the horizontal axis. Passive heat dissipation. Spotlight with standard wall-washer asymmetric screen for a uniform wall washing effect from the top down. Reflector in superpure mirrored aluminium with special faceting that improves the distribution of the light beam.

Installation

on an electrified track or special base

Colour

White (01) | Black (04)

Weight (Kg)

1.42

Mounting

three circuit track|wall surface|ceiling surface

Wiring

DALI components housed in the luminaire

Sistemi di controllo compatibili:

Quick BLE [↗](#)
Quick DALI - Touch display 7" [↗](#)
Quick DALI LMS Quick [↗](#)
Master Pro Evo KNX [↗](#)


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	995	Colour temperature [K]:	3000
W system:	28.5	MacAdam Step:	2
Im source:	2550	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	26	Lamp code:	LED
Luminous efficiency (Im/W, real value):	34.9	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	15	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	39	Control:	DALI-2
CRI (minimum):	97		

Polar

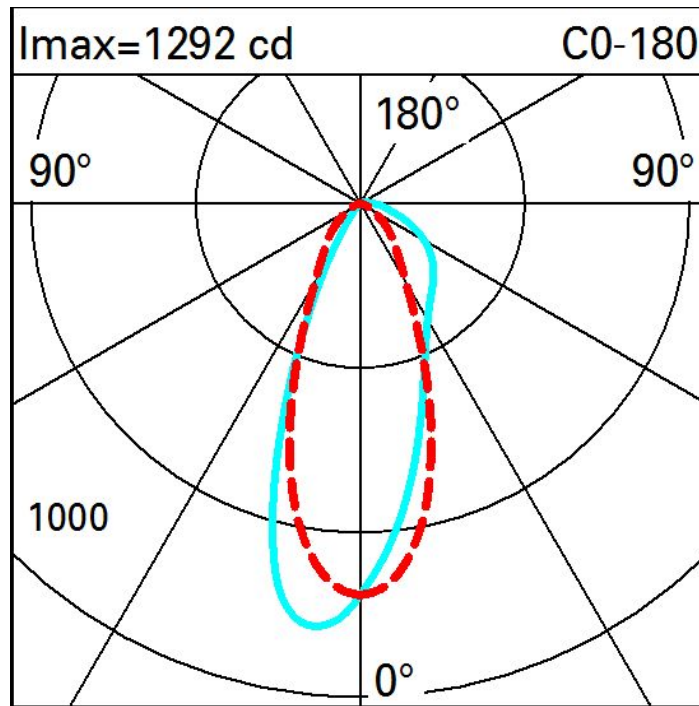

Illuminances

