


## iGuzzini

Last information update: February 2025

**Product configuration: QJ43**

QJ43: Minimal 15 cells - Wide Flood beam - LED



## Product code

QJ43: Minimal 15 cells - Wide Flood beam - LED

### Technical description

Linear miniaturised recessed luminaire with 15 optical elements for LED lamps - fixed optic. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, minimal (frameless) version for mounting flush with the ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Metallised, thermoplastic, high definition Opti Beam reflector, integrated in a set-back position in the anti-glare screen. Supplied with a dimmable DALI power supply unit connected to the luminaire.

## Installation

The luminaire is recessed in the specific adapter (QJ93) by means of a steel wire spring, previously installed on the ceiling that can be 12.5 / 15 / 20 mm thick. A special protective sheath allows finishing operations on the plasterboard to be simplified and speeded up.

**Colour**

White (01) | Black (04) | Gold (14)\* | Burnished chrome (E6)\*

**Weight (Kg)**

0.59

\* Colours on request

## Mounting

wall recessed|ceiling recessed

## Wiring

On the power supply unit with terminal board included.

## Notes

The special steel wire spring provided is required to facilitate the eventual extraction of the recessed body once it has been inserted.


Complies with EN60598-1 and pertinent regulations



## Technical data

lm system:	2241	Colour temperature [K]:	3000
W system:	33.8	MacAdam Step:	2
lm source:	2700	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	30	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	66.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	58°	Control:	DALI-2
CRI (minimum):	90		


## Polar

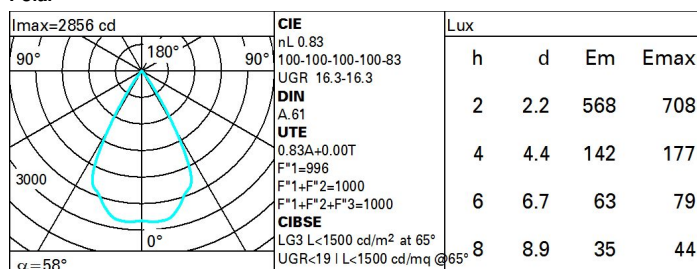

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

# Luminance curve limit

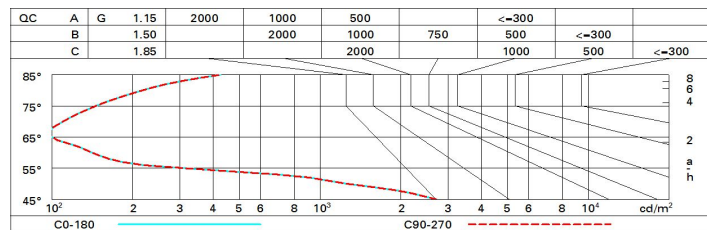

# UGR diagram

Corrected UGR values (at 2700 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x            y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	16.9	17.4	17.2	17.6	17.8	16.9	17.4	17.2	17.6	17.8
	3H	16.8	17.2	17.1	17.5	17.7	16.8	17.2	17.1	17.5	17.7
	4H	16.7	17.1	17.0	17.4	17.7	16.7	17.1	17.0	17.4	17.7
	6H	16.6	17.0	17.0	17.3	17.6	16.6	17.0	17.0	17.3	17.6
	8H	16.6	17.0	17.0	17.3	17.6	16.6	17.0	17.0	17.3	17.6
	12H	16.6	16.9	16.9	17.2	17.6	16.6	16.9	16.9	17.2	17.6
4H	2H	16.7	17.1	17.0	17.4	17.7	16.7	17.1	17.0	17.4	17.7
	3H	16.6	16.9	16.9	17.2	17.6	16.6	16.9	16.9	17.2	17.6
	4H	16.5	16.8	16.9	17.1	17.5	16.5	16.8	16.9	17.1	17.5
	6H	16.4	16.7	16.8	17.0	17.5	16.4	16.7	16.8	17.0	17.5
	8H	16.3	16.6	16.8	17.0	17.4	16.3	16.6	16.8	17.0	17.4
	12H	16.3	16.5	16.7	16.9	17.4	16.3	16.5	16.7	16.9	17.4
8H	4H	16.3	16.6	16.8	17.0	17.4	16.3	16.6	16.8	17.0	17.4
	6H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9	17.4
	8H	16.2	16.4	16.7	16.8	17.3	16.2	16.4	16.7	16.8	17.3
	12H	16.1	16.3	16.6	16.8	17.3	16.1	16.3	16.6	16.8	17.3
12H	4H	16.3	16.5	16.7	16.9	17.4	16.3	16.5	16.7	16.9	17.4
	6H	16.2	16.4	16.7	16.8	17.3	16.2	16.4	16.7	16.8	17.3
	8H	16.1	16.3	16.6	16.8	17.3	16.1	16.3	16.6	16.8	17.3
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				