

Laser Blade



Design iGuzzini

iGuzzini

Last information update: February 2025

Product configuration: QL18.01

QL18.01: Minimal 10 cells - Flood - LED - White

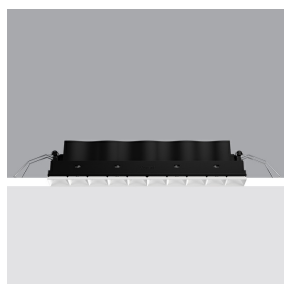

Product code

QL18.01: Minimal 10 cells - Flood - LED - White

Technical description

Linear miniaturised recessed luminaire with 10 optical elements for LED lamps - fixed optic. Die-cast aluminium body, minimal version (frameless) installed flush with ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Metallised thermoplastic high definition OptiBeam reflector, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with a dimmable DALI power supply unit connected to the luminaire. High colour rendering LED.

Installation

The recess body is inserted in the specific adapter installed previously by means of a steel wire spring - check the thickness of the false ceiling and use a compatible frame available with a separate item code.

Colour

White (01)

Weight (Kg)

0.55

Mounting

mounting
wall recessed|ceiling recessed

Wiring

Quick-coupling connections on the ballast unit.


Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|----------------------------------------------------|------|---------------------------------------|-------------------------------|
| lm system: | 1358 | CRI (typical): | 97 |
| W system: | 24.5 | Colour temperature [K]: | 2700 |
| lm source: | 1700 | MacAdam Step: | 3 |
| W source: | 21 | Life Time LED 1: | 50,000h - L90 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value): | 55.4 | Lamp code: | LED |
| lm in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 80 | Number of optical assemblies: | 1 |
| Beam angle [°]: | 31° | Control: | DALI-2 |
| CRI (minimum): | 95 | | |

Polar

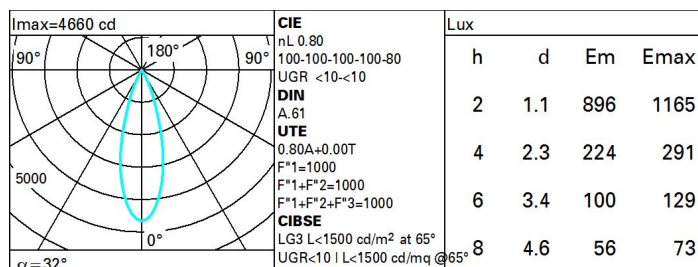

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 72 | 69 | 66 | 64 | 68 | 66 | 65 | 63 | 78 |
| 1.0 | 75 | 72 | 70 | 68 | 71 | 69 | 69 | 66 | 83 |
| 1.5 | 79 | 77 | 75 | 73 | 76 | 74 | 73 | 71 | 89 |
| 2.0 | 81 | 80 | 78 | 77 | 79 | 77 | 76 | 74 | 93 |
| 2.5 | 83 | 82 | 81 | 80 | 80 | 79 | 79 | 77 | 96 |
| 3.0 | 84 | 83 | 82 | 81 | 82 | 81 | 80 | 78 | 98 |
| 4.0 | 85 | 84 | 84 | 83 | 83 | 82 | 81 | 79 | 99 |
| 5.0 | 85 | 85 | 85 | 84 | 84 | 83 | 82 | 80 | 100 |

UGR diagram

| Corrected UGR values (at 1700 lm bare lamp luminous flux) | | | | | | | | | | | |
|-----------------------------------------------------------|-----|------------------|--------------|------|------|------|----------------|------|------|------|------|
| Reflect.: | | viewed crosswise | | | | | viewed endwise | | | | |
| ceiling | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 |
| walls | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 |
| work pl. | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 |
| Room dim | | viewed crosswise | | | | | viewed endwise | | | | |
| x | y | | | | | | | | | | |
| 2H | 2H | -3.5 | -2.9 | -3.2 | -2.7 | -2.5 | -3.5 | -2.9 | -3.2 | -2.7 | -2.5 |
| | 3H | -3.6 | -3.1 | -3.3 | -2.9 | -2.6 | -3.6 | -3.1 | -3.3 | -2.9 | -2.6 |
| | 4H | -3.7 | -3.2 | -3.3 | -2.9 | -2.6 | -3.7 | -3.2 | -3.3 | -2.9 | -2.6 |
| | 6H | -3.7 | -3.3 | -3.4 | -3.0 | -2.7 | -3.7 | -3.3 | -3.4 | -3.0 | -2.7 |
| | 8H | -3.8 | -3.4 | -3.4 | -3.1 | -2.7 | -3.8 | -3.4 | -3.4 | -3.1 | -2.7 |
| | 12H | -3.8 | -3.4 | -3.4 | -3.1 | -2.8 | -3.8 | -3.4 | -3.4 | -3.1 | -2.8 |
| 4H | 2H | -3.7 | -3.2 | -3.3 | -2.9 | -2.6 | -3.7 | -3.2 | -3.3 | -2.9 | -2.6 |
| | 3H | -3.8 | -3.4 | -3.4 | -3.1 | -2.8 | -3.8 | -3.4 | -3.4 | -3.1 | -2.8 |
| | 4H | -3.9 | -3.6 | -3.5 | -3.2 | -2.8 | -3.9 | -3.6 | -3.5 | -3.2 | -2.8 |
| | 6H | -4.0 | -3.7 | -3.6 | -3.3 | -2.9 | -4.0 | -3.7 | -3.6 | -3.3 | -2.9 |
| | 8H | -4.0 | -3.8 | -3.6 | -3.4 | -2.9 | -4.0 | -3.8 | -3.6 | -3.4 | -2.9 |
| | 12H | -4.1 | -3.8 | -3.6 | -3.4 | -3.0 | -4.1 | -3.8 | -3.6 | -3.4 | -3.0 |
| 8H | 4H | -4.0 | -3.8 | -3.6 | -3.4 | -2.9 | -4.0 | -3.8 | -3.6 | -3.4 | -2.9 |
| | 6H | -4.1 | -3.9 | -3.7 | -3.5 | -3.0 | -4.1 | -3.9 | -3.7 | -3.5 | -3.0 |
| | 8H | -4.2 | -4.0 | -3.7 | -3.5 | -3.0 | -4.2 | -4.0 | -3.7 | -3.5 | -3.0 |
| | 12H | -4.2 | -4.1 | -3.7 | -3.6 | -3.1 | -4.2 | -4.1 | -3.7 | -3.6 | -3.1 |
| 12H | 4H | -4.1 | -3.8 | -3.6 | -3.4 | -3.0 | -4.1 | -3.8 | -3.6 | -3.4 | -3.0 |
| | 6H | -4.2 | -4.0 | -3.7 | -3.5 | -3.0 | -4.2 | -4.0 | -3.7 | -3.5 | -3.0 |
| | 8H | -4.2 | -4.1 | -3.7 | -3.6 | -3.1 | -4.2 | -4.1 | -3.7 | -3.6 | -3.1 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | | 1.0H | 0.8 / -18.5 | | | | 0.8 / -18.5 | | | | |
| | | 1.5H | 9.6 / -18.7 | | | | 9.6 / -18.7 | | | | |
| | | 2.0H | 11.6 / -23.0 | | | | 11.6 / -23.0 | | | | |