

## Laser Blade

Design iGuzzini

iGuzzini

Last information update: April 2025

### Product configuration: QQ69

QQ69: 10 - cell Frameless Recessed luminaire - LED Neutral White Wide Flood optic



### Product code

QQ69: 10 - cell Frameless Recessed luminaire - LED Neutral White Wide Flood optic

### Technical description

rectangular miniaturised recessed luminaire with 10 optical elements with LED lamps - fixed optics - wide flood beam angle. Main body with die-cast aluminium radiant surface, minimal (frameless) version for mounting flush with the ceiling. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Neutral white LED.

### Installation

recessed with steel wire springs on the specific adapter (included) which allows flush-mounting with the ceiling. Adapter fixed to false ceiling (12.5 mm thick) with self-tapping screws; subsequent filling and smoothing operations; insertion of luminaire body and aesthetic finishing. Preparation hole 35 x 271

### Colour

White (01) | Black (04)

### Mounting

wall recessed|ceiling recessed


Complies with EN60598-1 and pertinent regulations



IP20

IP23


On the visible part of the product once installed



### Technical data

lm system:	1659	CRI (typical):	97
W system:	21	Colour temperature [K]:	4000
lm source:	2000	MacAdam Step:	3
W source:	21	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	79	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	48°	LED current [mA]:	700
CRI (minimum):	95		

### Polar

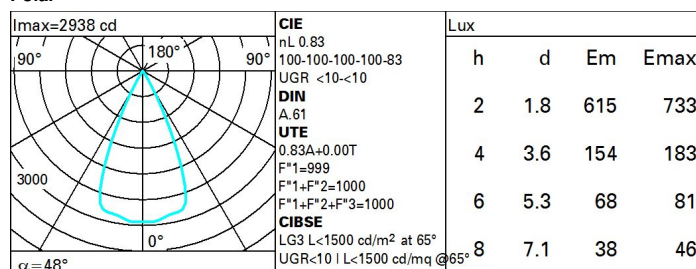

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

# UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	1.7	2.2	2.0	2.4	2.7	1.7	2.2	2.0	2.4	2.7
	3H	1.6	2.0	1.9	2.3	2.6	1.6	2.0	1.9	2.3	2.6
	4H	1.5	1.9	1.9	2.2	2.5	1.5	1.9	1.9	2.2	2.5
	6H	1.5	1.8	1.8	2.1	2.5	1.5	1.8	1.8	2.1	2.5
	8H	1.4	1.8	1.8	2.1	2.4	1.4	1.8	1.8	2.1	2.4
	12H	1.4	1.7	1.8	2.1	2.4	1.4	1.7	1.8	2.1	2.4
4H	2H	1.5	1.9	1.9	2.2	2.5	1.5	1.9	1.9	2.2	2.5
	3H	1.4	1.7	1.8	2.1	2.4	1.4	1.7	1.8	2.1	2.4
	4H	1.3	1.6	1.7	2.0	2.3	1.3	1.6	1.7	2.0	2.3
	6H	1.2	1.5	1.6	1.9	2.3	1.2	1.5	1.6	1.9	2.3
	8H	1.2	1.4	1.6	1.8	2.3	1.2	1.4	1.6	1.8	2.3
	12H	1.1	1.3	1.6	1.8	2.2	1.1	1.3	1.6	1.8	2.2
8H	4H	1.2	1.4	1.6	1.8	2.3	1.2	1.4	1.6	1.8	2.3
	6H	1.1	1.3	1.5	1.7	2.2	1.1	1.3	1.5	1.7	2.2
	8H	1.0	1.2	1.5	1.7	2.1	1.0	1.2	1.5	1.7	2.1
	12H	1.0	1.1	1.5	1.6	2.1	1.0	1.1	1.5	1.6	2.1
12H	4H	1.1	1.3	1.6	1.8	2.2	1.1	1.3	1.6	1.8	2.2
	6H	1.0	1.2	1.5	1.7	2.1	1.0	1.2	1.5	1.7	2.2
	8H	1.0	1.1	1.5	1.6	2.1	1.0	1.1	1.5	1.6	2.1
Variations with the observer position at spacing:											
S =		0.9 / -18.0					0.9 / -18.0				
		9.7 / -18.3					9.7 / -18.3				
		11.7 / -18.4					11.7 / -18.4				