

Design iGuzzini iGuzzini

**Product configuration: QV69.D8**

Product code

### Technical description

## Installation

**Colour**

Weight (Kg)

## Mounting

## Wiring


Complies with EN60598-1 and pertinent regulations



## Technical data

Im system:	886	MacAdam Step:	3
W system:	13.2	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Im source:	1150	Lamp code:	LED
W source:	9.4	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	67.1	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	77	Inrush current:	29 A / 153 µs
Beam angle [°]:	42°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 32 luminaires B16A: 51 luminaires C10A: 53 luminaires C16A: 86 luminaires
CRI (minimum):	90	Minimum dimming %:	1
CRI (typical):	92	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	Tunable white 2700 - 6500	Control:	DALI-2


## Polar

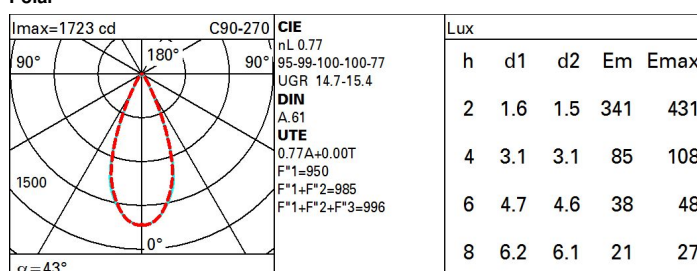

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	64	61	59	63	61	60	58	75
1.0	71	67	65	63	67	64	64	61	80
1.5	75	72	70	68	71	69	69	66	86
2.0	78	76	74	73	74	73	72	70	91
2.5	79	78	76	75	76	75	75	72	94
3.0	80	79	78	77	78	77	76	74	96
4.0	81	80	80	79	79	79	77	75	98
5.0	82	81	81	80	80	79	78	76	99

# Luminance curve limit

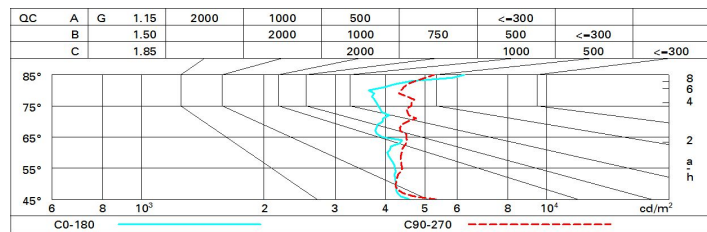

# UGR diagram

Corrected UGR values (at 1150 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	13.4	14.0	13.7	14.2	14.5	14.4	14.9	14.6	15.2	15.4
	3H	13.7	14.2	14.1	14.5	14.8	14.4	14.9	14.7	15.2	15.4
	4H	13.9	14.4	14.3	14.7	15.0	14.4	14.9	14.7	15.2	15.5
	6H	14.1	14.5	14.5	14.9	15.2	14.4	14.8	14.7	15.1	15.4
	8H	14.2	14.6	14.6	14.9	15.3	14.3	14.8	14.7	15.1	15.4
	12H	14.4	14.8	14.7	15.1	15.4	14.3	14.7	14.7	15.0	15.4
4H	2H	13.5	14.0	13.9	14.3	14.6	15.0	15.4	15.3	15.7	16.0
	3H	14.0	14.4	14.4	14.7	15.1	15.2	15.6	15.6	16.0	16.3
	4H	14.3	14.6	14.7	15.0	15.4	15.3	15.7	15.7	16.1	16.5
	6H	14.6	14.9	15.0	15.3	15.7	15.4	15.7	15.8	16.1	16.5
	8H	14.7	15.0	15.2	15.4	15.8	15.4	15.7	15.8	16.1	16.5
	12H	15.0	15.2	15.4	15.6	16.1	15.4	15.6	15.8	16.1	16.5
8H	4H	14.4	14.7	14.8	15.1	15.5	15.8	16.1	16.2	16.5	16.9
	6H	14.8	15.0	15.3	15.5	15.9	16.0	16.2	16.4	16.7	17.1
	8H	15.0	15.2	15.5	15.7	16.2	16.0	16.2	16.5	16.7	17.2
	12H	15.4	15.5	15.9	16.0	16.5	16.1	16.2	16.6	16.7	17.2
12H	4H	14.4	14.7	14.9	15.1	15.5	15.9	16.2	16.4	16.6	17.1
	6H	14.8	15.0	15.3	15.5	16.0	16.1	16.3	16.6	16.8	17.3
	8H	15.1	15.2	15.6	15.7	16.2	16.2	16.4	16.7	16.9	17.4
Variations with the observer position at spacing:											
S =		1.0H					1.9 / -1.5				
		1.5H					3.6 / -1.8				
		2.0H					5.2 / -2.1				
							1.8 / -1.7				
							3.6 / -1.9				
							5.2 / -2.2				